
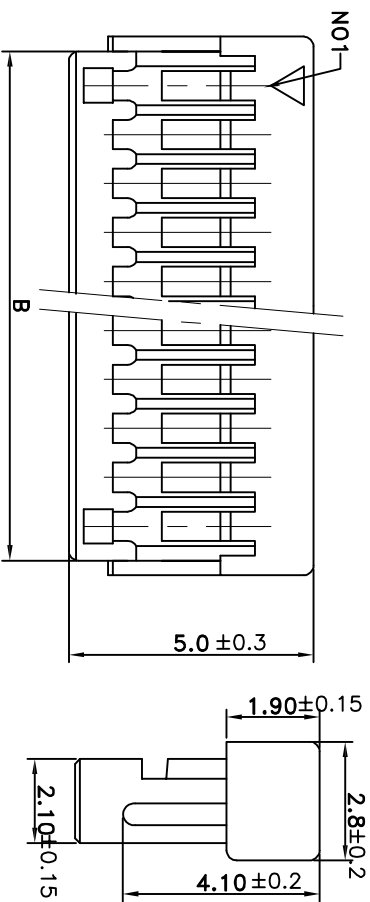


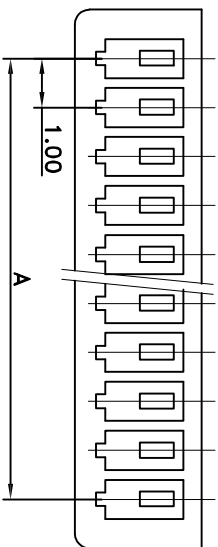

SPECIFICATIONS

Voltage rating: 50V AC, DC
 Current rating: 1.0A AC/DC (AWG#28)
 Withstanding Voltage: 500V AC/minute
 Insulation resistance: 100M Ω min
 Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
 Contact resistance: 20m Ω

HOUSING

Part No: SCT1001HA-XXP
 Poles: 2-20
 Material: PBT UL94V-0
 Q'TY: 1000 pcs/bag

PART NO	DIMENSION		PART NO	DIMENSION	
	A	B		A	B
SCT1001HA-02P	1.00	2.40	SCT1001HA-12P	11.00	12.40
SCT1001HA-03P	2.00	3.40	SCT1001HA-13P	12.00	13.40
SCT1001HA-04P	3.00	4.40	SCT1001HA-14P	13.00	14.40
SCT1001HA-05P	4.00	5.40	SCT1001HA-15P	14.00	15.40
SCT1001HA-06P	5.00	6.40	SCT1001HA-16P	15.00	16.40
SCT1001HA-07P	6.00	7.40	SCT1001HA-17P	16.00	17.40
SCT1001HA-08P	7.00	8.40	SCT1001HA-18P	17.00	18.40
SCT1001HA-09P	8.00	9.40	SCT1001HA-19P	18.00	19.40
SCT1001HA-10P	9.00	10.40	SCT1001HA-20P	19.00	20.40
SCT1001HA-11P	10.00	11.40			

				OPERATION	DRAW	WENDY	2016.11.07	SCALE	森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
				~ 10 20 ~ 30	DESIGN			mm		
				30 ~ Angle	CHECK	Micky	2016.11.07	A4	PART NO.	SCT1001HA-XXP
0	2016.11.07	NEW		± 2	CHECK	Allen	2016.11.07	1/1	TITLE:	SH1.0 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	Allen	2016.11.07	PROJ.	DRAWING NO.	SCT1001HA