

1 2 3 4 5 6 7 8 9 10

A

B

C





D

E


F

G

H

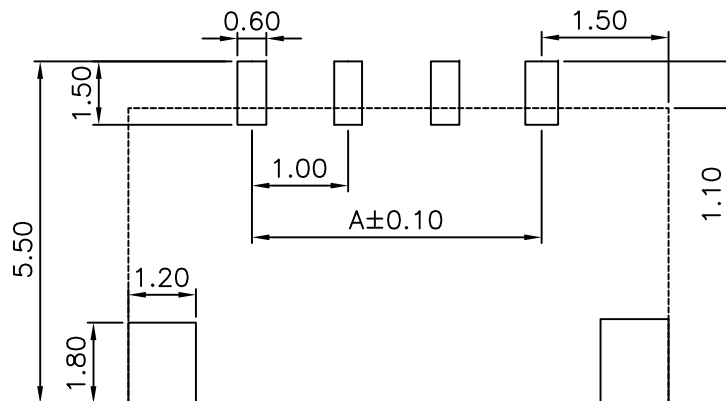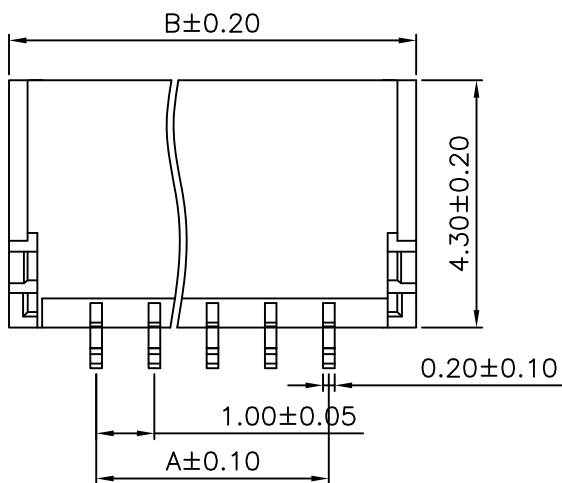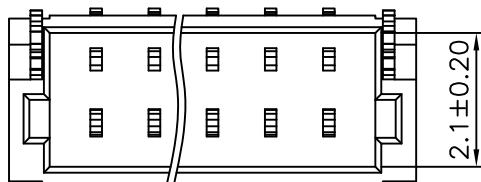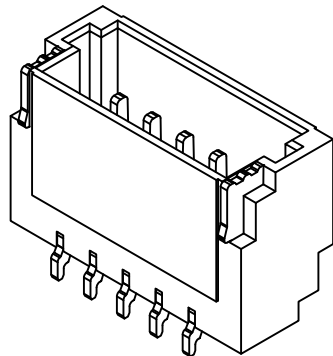

P.C.B LAYOUT

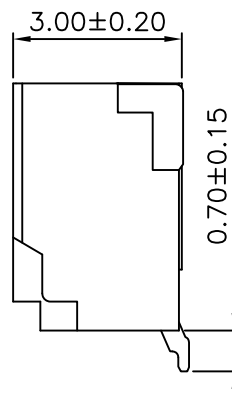

SPECIFICATIONS

Voltage rating: 50V AC,DC
Current rating: 1.0A AC/DC (AWG#28)
Withstanding voltage: 500V AC/minute
Insulation resistance: 100M Ω min
Temperature range: -25 °C - +85 °C
Contact resistance: 20m Ω max

WAFER

Part No.: SCT1001WR-S-XXP
Poles: 2-20
Material: Contact: Phos. Bronze, Tin Plated
Base: PA9T, UL94V-0
Q' TY: 1000 pcs/Tape & Reel

PART NO	DIMENSION	
	A	B
SCT1001WR-S-02	1.00	4.00
SCT1001WR-S-03	2.00	5.00
SCT1001WR-S-04	3.00	6.00
SCT1001WR-S-05	4.00	7.00
SCT1001WR-S-06	5.00	8.00
SCT1001WR-S-07	6.00	9.00
SCT1001WR-S-08	7.00	10.00
SCT1001WR-S-09	8.00	11.00
SCT1001WR-S-10	9.00	12.00
SCT1001WR-S-11	10.00	13.00

PART NO	DIMENSION	
	A	B
SCT1001WR-S-12	11.00	14.00
SCT1001WR-S-13	12.00	15.00
SCT1001WR-S-14	13.00	16.00
SCT1001WR-S-15	14.00	17.00
SCT1001WR-S-16	15.00	18.00
SCT1001WR-S-17	16.00	19.00
SCT1001WR-S-18	17.00	20.00
SCT1001WR-S-19	18.00	21.00
SCT1001WR-S-20	19.00	22.00

					OPERATION		DRAW	Micky.Liu	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10	±0.15	DESIGN			UNIT	mm		
					20 ~ 30	±0.30				SIZE	A4		
0	05/12/27	NEW			30 ~	±0.50	CHECK	Judy.Huang	2006/05/02	SHEET	1/1	PART NO.	SCT1001WR-S-XXP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 2°	APPROVE	Hellen.Li	2006/05/02	PROJ.		TITLE:	SH1.0 90C SMT WAFER
					DIM	TOL						DRAWING NO.	SCT1001

1 2 3 4 5 6 7 8 9 10