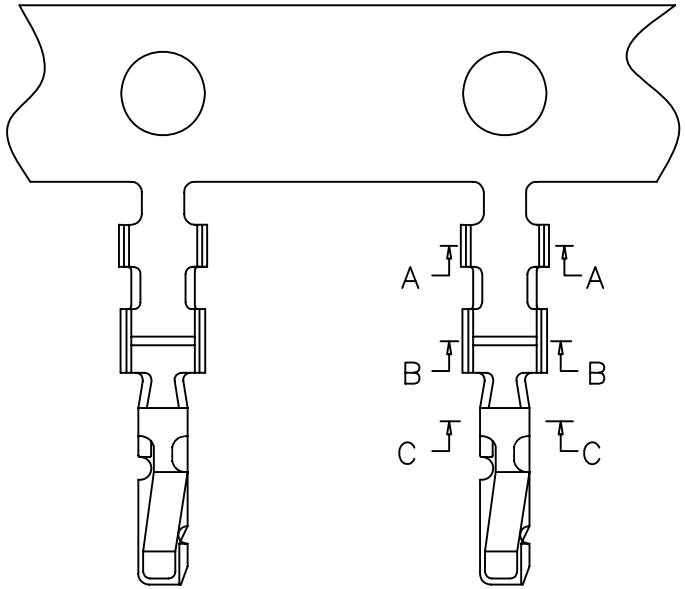

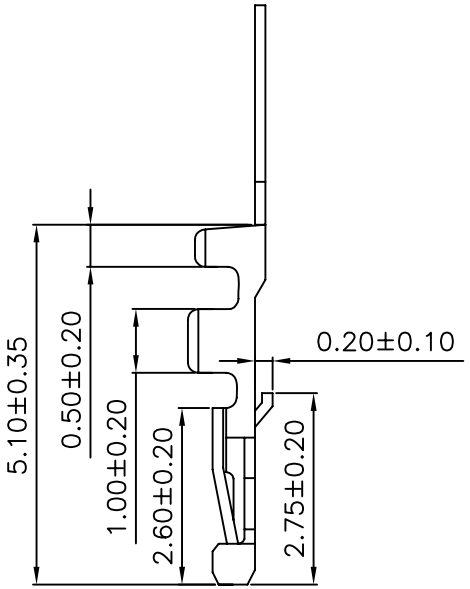

SPECIFICATIONS

Voltage rating: 100V AC,DC
Current rating: 0.5A AC/DC (AWG#28)
Withstanding Voltage:300V AC/minute
Insulation resistance:100MΩ min
Temperature range:-25℃ - +85℃
Contact resistance:30mΩ

TERMINAL

Part No: SCT1009TPG
Thickness:0.15mm
Material:Phosphor.Bronze,Tin Plated.
Wire Range:AWG#30-#32(OD0.6mm)
Reel Q'ty:20,000 pcs/reel



A–A



B–B



C–C

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	Judy.Huang	2006/05/02
DESIGN		
CHECK	Micky.Liu	2006/05/02
APPROVE	Hellen.Li	2006/05/02

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

PART NO.	SCT1009TPG
TITLE:	HRS DF19 1.0mm TERMINAL
DRAWING NO.	SCT1009