
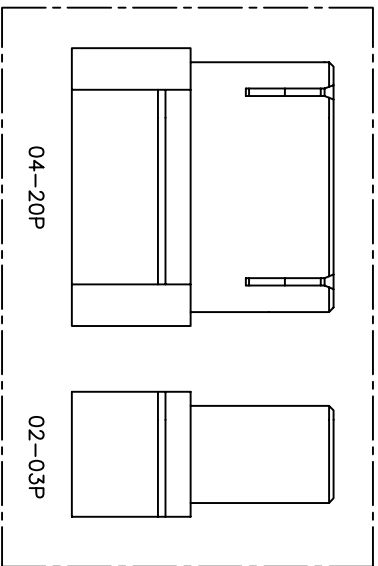


SPECIFICATIONS
 Voltage rating: 50V AC, DC
 Current rating: 1.0A AC/DC (AWG#28)
 Withstanding Voltage: 500V AC/minute
 Insulation resistance: 100MΩ min
 Temperature range: -25°C - +85°C
 Contact resistance: 20mΩ
HOUSING
 Part No.: SCT10010HN-XXP
 Poles: 2-20P
 Material: PA66, UL94V-0
 Q' TY: 1000 pcs/bag

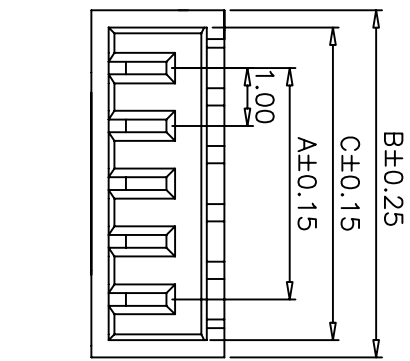

PART NO.	Dimension			PART NO.	Dimension		
	A	B	C		A	B	C
SCT1010HN-02P	1.00	3.00	2.40	SCT1010HN-12P	11.00	13.00	12.40
SCT1010HN-03P	2.00	4.00	3.40	SCT1010HN-13P	12.00	14.00	13.40
SCT1010HN-04P	3.00	5.00	4.40	SCT1010HN-14P	13.00	15.00	14.40
SCT1010HN-05P	4.00	6.00	5.40	SCT1010HN-15P	14.00	16.00	15.40
SCT1010HN-06P	5.00	7.00	6.40	SCT1010HN-16P	15.00	17.00	16.40
SCT1010HN-07P	6.00	8.00	7.40	SCT1010HN-17P	16.00	18.00	17.40
SCT1010HN-08P	7.00	9.00	8.40	SCT1010HN-18P	17.00	19.00	18.40
SCT1010HN-09P	8.00	10.00	9.40	SCT1010HN-19P	18.00	20.00	19.40
SCT1010HN-10P	9.00	11.00	10.40	SCT1010HN-20P	19.00	21.00	20.40
SCT1010HN-11P	10.00	12.00	11.40				

Section A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	PART NO.	TITLE:
0	05/12/27	NEW			~ 10 20 ~ 30 30 ~	Judy Huang	mm	SCT1010HN-XXP	1.0mm Housing
					± 2'	Micky Liu	A4		
					Angle	Hellen Li	1/1		
					DIM	2006/05/02			
					TOL	2006/05/02			
					APPROVE				

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

