

1 2 3 4 5 6 7 8 9 10

A

B

C





D

E

F

G

H

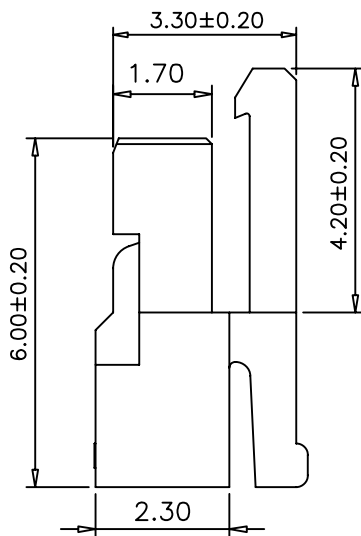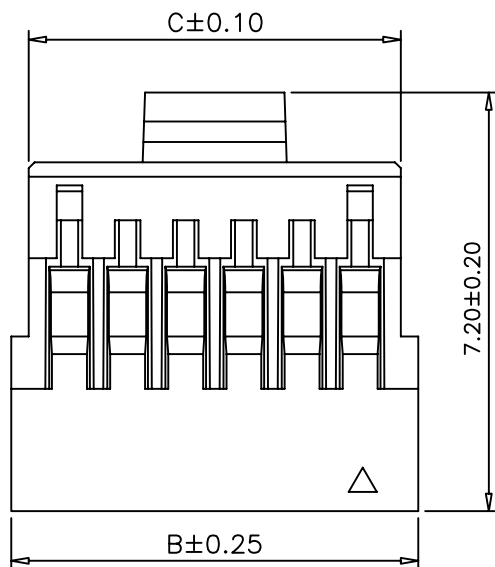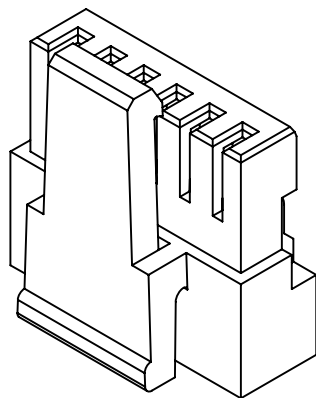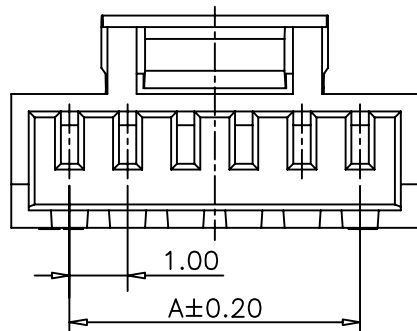

SPECIFICATIONS

Voltage rating: 50V AC, DC

Current rating: 1.0A AC/DC (AWG#28)

Withstanding Voltage: 500V AC/minute

Insulation resistance: 100MΩ min

Temperature range: -25°C - +85°C

Contact resistance: 20mΩ

HOUSING

Part No: SCT10010H-XXP

Poles: 2-20P

Material: PA66, UL94V-0

Q' TY: 1000 pcs/bag

PART NO.	Dimension			PART NO.	Dimension		
	A	B	C		A	B	C
SCT1010H-02P	1.00	3.00	2.40	SCT1010H-12P	11.00	13.00	12.40
SCT1010H-03P	2.00	4.00	3.40	SCT1010H-13P	12.00	14.00	13.40
SCT1010H-04P	3.00	5.00	4.40	SCT1010H-14P	13.00	15.00	14.40
SCT1010H-05P	4.00	6.00	5.40	SCT1010H-15P	14.00	16.00	15.40
SCT1010H-06P	5.00	7.00	6.40	SCT1010H-16P	15.00	17.00	16.40
SCT1010H-07P	6.00	8.00	7.40	SCT1010H-17P	16.00	18.00	17.40
SCT1010H-08P	7.00	9.00	8.40	SCT1010H-18P	17.00	19.00	18.40
SCT1010H-09P	8.00	10.00	9.40	SCT1010H-19P	18.00	20.00	19.40
SCT1010H-10P	9.00	11.00	10.40	SCT1010H-20P	19.00	21.00	20.40
SCT1010H-11P	10.00	12.00	11.40				

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
					~ 10 ±0.15	DESIGN			UNIT	mm			
					20 ~ 30 ±0.30				SIZE	A4			
0	05/12/27	NEW			30 ~ ±0.50	CHECK	Micky.Liu	2006/05/02	SHEET	1/1		PART NO.	SCT1010H-XXP
					Angle ± 2°	APPROVE						TITLE:	1.0mm Housing with lock
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL		Hellen.Li	2006/05/02	PROJ.		DRAWING NO.	SCT1010	

1 2 3 4 5 6 7 8 9 10