

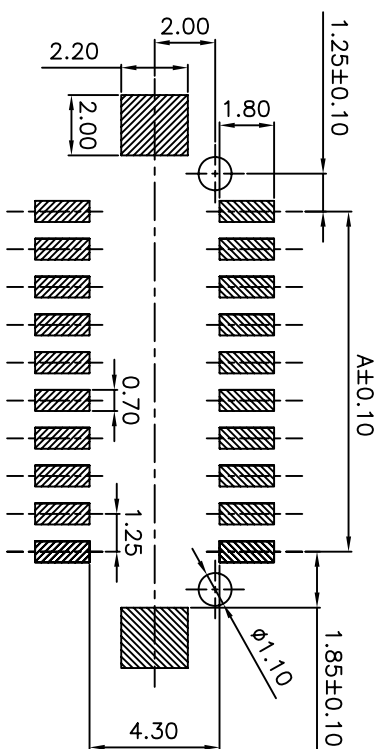



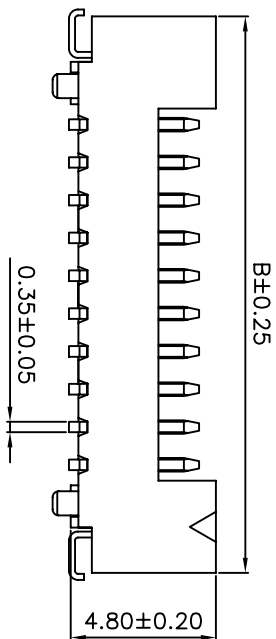

PCB LAYOUT

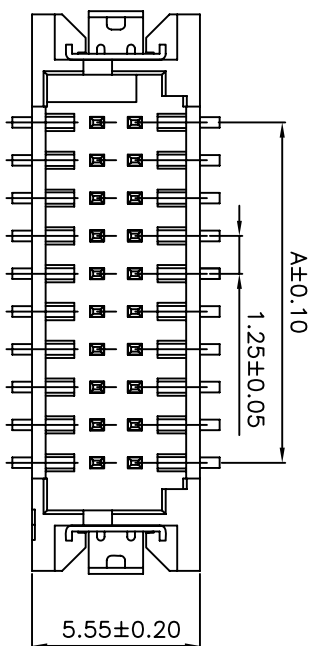

PART NO.	Dimensions	
	A	B
SCT1252WV-S-F-2X05P	5.00	12.15
SCT1252WV-S-F-2X07P	7.50	14.65
SCT1252WV-S-F-2X10P	11.25	18.40
SCT1252WV-S-F-2X15P	17.50	24.65
SCT1252WV-S-F-2X20P	23.75	30.90

SPECIFICATIONS
Voltage rating: 150V AC, DC
Current rating: 1A, AC, DC (AWG#28)
Withstanding voltage: 500V AC/minute
Insulation resistance: 500MΩ min
Temperature range: -40°C - +85°C
Contact resistance: 20mΩ max
WAFER
Part No.: SCT1252WV-S-F-2xXXP
Material: Nylon 9T, UL94V-0
Contact: Brass, Gold plated

OPERATION		DRAW		SCALE		SCONDA 森康达电子有限公司			
DESIGN		CHECK		UNIT		SCONDA ELECTRONIC LIMITED			
~ 10		~ 30		mm		SCT1252WV-S-F-2xXXP			
20 ~ 30		~ 30		SIZE		DF13 1.25 SMT 90C 2xXXP Wafer			
30 ~		~ 30		SHEET					
Angle		~ 2°		PROJ.					
DIM		TOL		APPROVE					
DATE		MODIFICATION DESCRIPTION		CHANGE					
REV		NEW		APPROVE					
05/12/27		DATE		APPROVE					
1		2		3		4			
5		6		7		8			
9		10							