
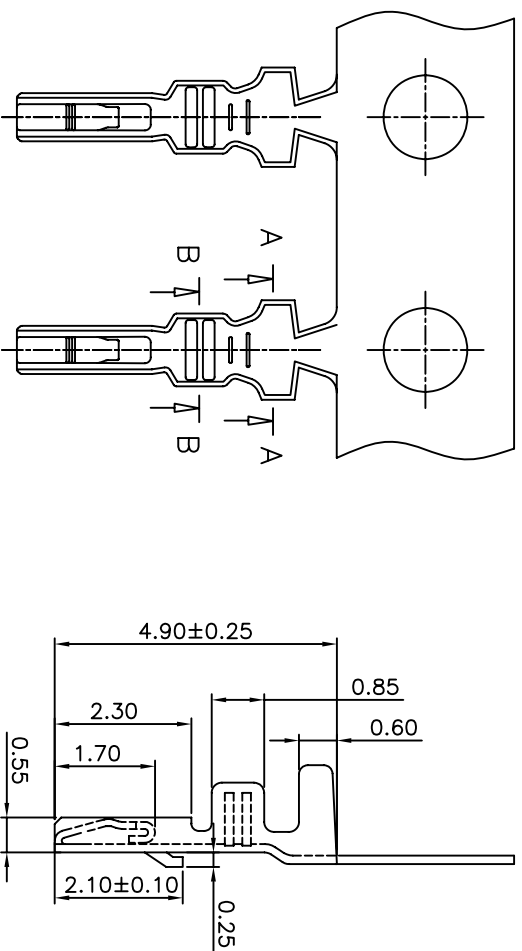


A-A



B-B

SPECIFICATIONS

Voltage rating: 150V AC, DC

Current rating: 1A, AC, DC (AWG#28)

Withstanding voltage: 500V AC/minute

Insulation resistance: 100M Ω min

Temperature range: -40°C - +85°C

Contact resistance: 20m Ω max

Part No.: SCT1258T

Thickness: 0.15mm

Material: Phosphor. Bronze

Wire Range: AWG#26-#30 (OD1.0mm)

OPERATION		DRAW		SCALE		SCONDA 森康达电子有限公司 SCONDA ELECTRONIC LIMITED			
~ 10		DESIGN		UNIT		PART NO.			
20 ~ 30				SIZE		SCT1258T			
30 ~		CHECK		SHEET		GH1.25 TERMINAL			
Angle $\pm 2^\circ$		APPROVE		PROJ.		SCT1258T			
DIM TOL		Hellen.Li		DRAWING NO.					
2006/05/02									

REV	DATE	MODIFICATION DESCRIPTION
-----	------	--------------------------

0	05/12/27	NEW
---	----------	-----

1		
---	--	--

2		
---	--	--

3		
---	--	--

4		
---	--	--

5		
---	--	--

6		
---	--	--

7		
---	--	--

8		
---	--	--

9		
---	--	--

10		
----	--	--