
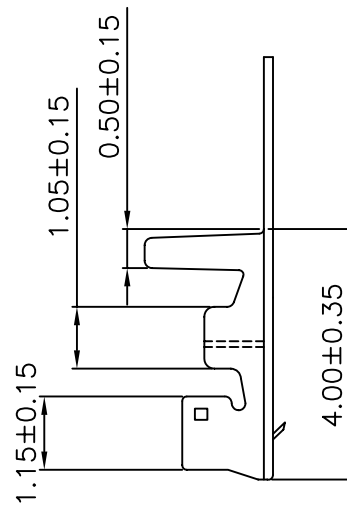


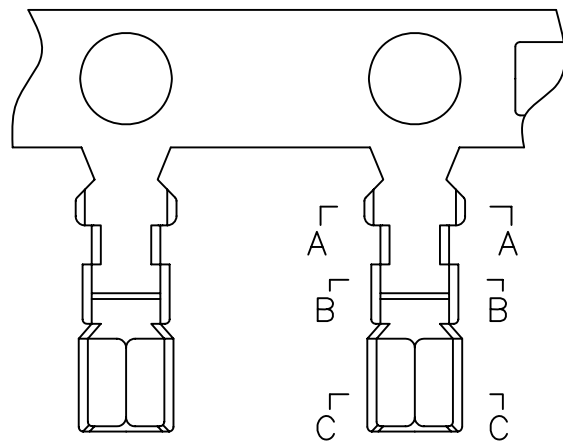


SPECIFICATIONS


Voltage rating: 100V AC, DC
 Current rating: 1A, AC, DC (AWG#26)
 Withstanding Voltage: 500V AC/minute
 Insulation resistance: 500MΩ min
 Temperature range: -25°C - +85°C
 Contact resistance: 20mΩ max

TERMINAL


Part No: SCT1501T
 Thickness: 0.20mm
 Material: Phosphor bronze
 Wire Range: AWG#26-#32 (OD1.0mm)
 Q'TY: 15000 pcs/reel



A-A



B-B



C-C

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
					~ 10 ±0.15	DESIGN			UNIT	mm			
					20 ~ 30 ±0.30		SIZE	A4	PART NO.	SCT1501T			
0	05/12/27	NEW		_____	30 ~ ±0.50		CHECK	Micky.Liu	2006/05/02	SHEET	1/1	TITLE:	ZH1.5 TERMINAL
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle ± 2°	APPROVE	Hellen.Li	2006/05/02	PROJ.		DRAWING NO.	SCT1501
						DIM TOL							