

PCB LAYOUT





SPECIFICATIONS

Voltage rating: 100V AC, DC
Current rating: 1A, AC, DC (AWG#26)
Withstanding Voltage: 500V AC/minute
Insulation resistance: 500M Ω min
Temperature range: -25°C - +85°C
Contact resistance: 20m Ω max

WAFER

Part No: SCT1501WV-XXP
Poles: 02-16
Material: Nylon 66, UL94V-0
Q' TY: 1000 pcs/bag

PART NO	DIMENSION	
	A	B
SCT1501WV-02	1.50	4.50
SCT1501WV-03	3.00	6.00
SCT1501WV-04	4.50	7.50
SCT1501WV-05	6.00	9.00
SCT1501WV-06	7.50	10.50
SCT1501WV-07	9.00	12.00
SCT1501WV-08	10.50	13.50
SCT1501WV-09	12.00	15.00
SCT1501WV-10	13.50	16.50
SCT1501WV-11	15.00	18.00
SCT1501WV-12	16.50	19.50
SCT1501WV-13	18.00	21.00
SCT1501WV-14	19.50	22.50
SCT1501WV-15	21.00	24.00
SCT1501WV-16	22.50	25.50

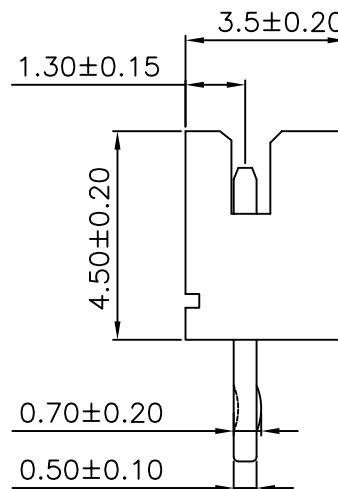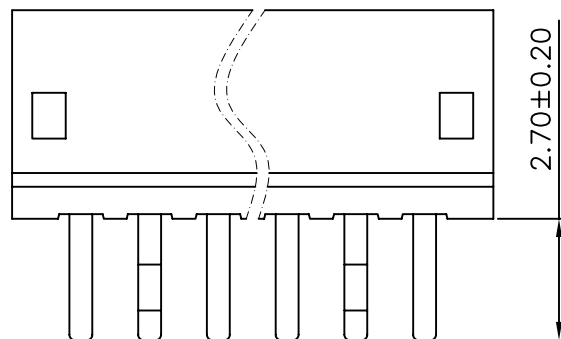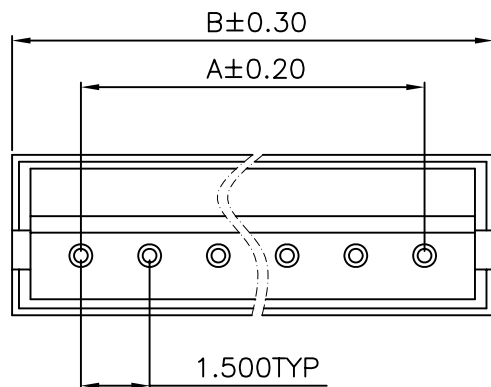

					OPERATION		DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDA ELECTRONIC LIMITED		
					~ 10	±0.15	DESIGN			UNIT	mm			
					20 ~ 30	±0.30				SIZE	A4		PART NO.	SCT1501WV-XXP
0	05/12/27	NEW			30 ~	±0.50	CHECK	Micky.Liu	2006/05/02	SHEET	1/1		TITLE:	ZH1.5 180C WAFER
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM	± 2' TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.		DRAWING NO.	SCT1501