

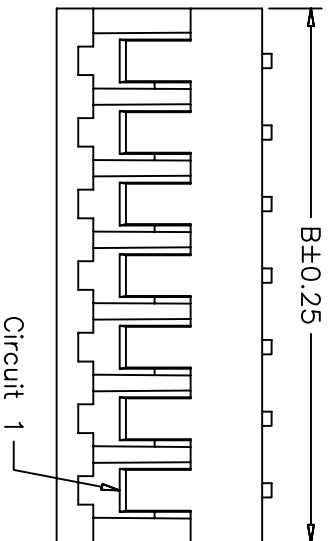


SPECIFICATIONS

Voltage rating: 200V AC, DC
Current rating: 1A, AC, DC (AWG#26)
Withstanding Voltage: 500V AC/minute
Insulation resistance:100M Ω min
Temperature range:-25 $^{\circ}$ C - +85 $^{\circ}$ C
Contact resistance:20m Ω max

HOUSING

Part No:SCT1502HR-XXPA
Poles:02-15
Material:Nylon 66, UL94V-0
Q' TY: 1000 pcs/bag

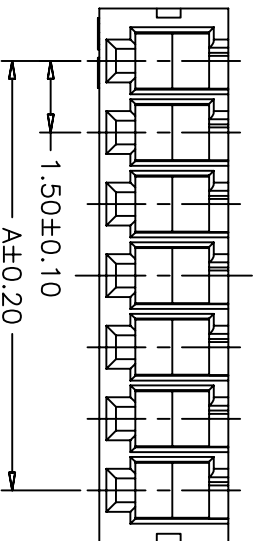

PART NO.	Dimensions	
	A	B
SCT1502HR-2P	1.50	3.70
SCT1502HR-3P	3.00	5.20
SCT1502HR-4P	4.50	6.70
SCT1502HR-5P	6.00	8.20
SCT1502HR-6P	7.50	9.70
SCT1502HR-7P	9.00	11.20
SCT1502HR-8P	10.50	12.70
SCT1502HR-9P	12.00	14.20
SCT1502HR-10P	13.50	15.70
SCT1502HR-11P	15.00	17.20
SCT1502HR-12P	16.50	18.70
SCT1502HR-13P	18.00	20.20
SCT1502HR-14P	19.50	21.70
SCT1502HR-15P	21.00	23.20

					OPERATION		DRAW	Judy Luo	05/12/25	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 20 ~ 30	±0.15 ±0.30	DESIGN			UNIT	mm		
					30 ~	±0.50	CHECK	Micky	05/12/25	SIZE	A4	PART NO.	SCT1502HR-XXPA
0	05/12/27	NEW			Angle	± 2'				SHEET	1/1	TITLE:	SZN1.5 90C Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	Hellen	05/12/25	PROU.		DRAWING NO.	SCT1502

1 2 3 4 5 6 7 8 9 10