

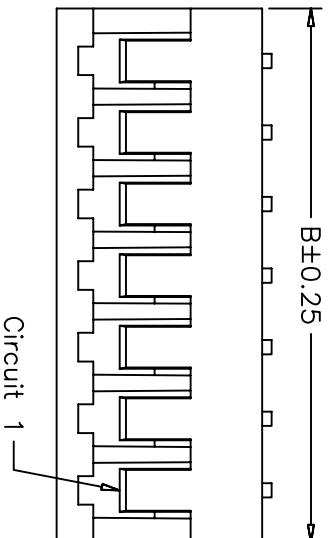


## SPECIFICATIONS

Voltage rating: 200V AC, DC  
 Current rating: 1A, AC, DC (AWG#26)  
 Withstanding Voltage: 500V AC/minute  
 Insulation resistance: 100M $\Omega$  min  
 Temperature range: -25°C - +85°C  
 Contact resistance: 20m $\Omega$  max

HOUSING  
Part No: SCT1502HV-XXP  
Poles: 02-15  
Material: Nylon 66, UL94V-0  
Q' TY: 1000 pcs/bag

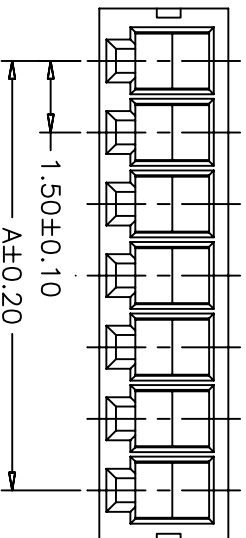

| PART NO.      | Dimensions |       |
|---------------|------------|-------|
|               | A          | B     |
| SCT1502HV-2P  | 1.50       | 3.70  |
| SCT1502HV-3P  | 3.00       | 5.20  |
| SCT1502HV-4P  | 4.50       | 6.70  |
| SCT1502HV-5P  | 6.00       | 8.20  |
| SCT1502HV-6P  | 7.50       | 9.70  |
| SCT1502HV-7P  | 9.00       | 11.20 |
| SCT1502HV-8P  | 10.50      | 12.70 |
| SCT1502HV-9P  | 12.00      | 14.20 |
| SCT1502HV-10P | 13.50      | 15.70 |
| SCT1502HV-11P | 15.00      | 17.20 |
| SCT1502HV-12P | 16.50      | 18.70 |
| SCT1502HV-13P | 18.00      | 20.20 |
| SCT1502HV-14P | 19.50      | 21.70 |
| SCT1502HV-15P | 21.00      | 23.20 |

[illegible]