

1 2 3 4 5 6 7 8 9 10

A

B

C




D

E


F

G


H

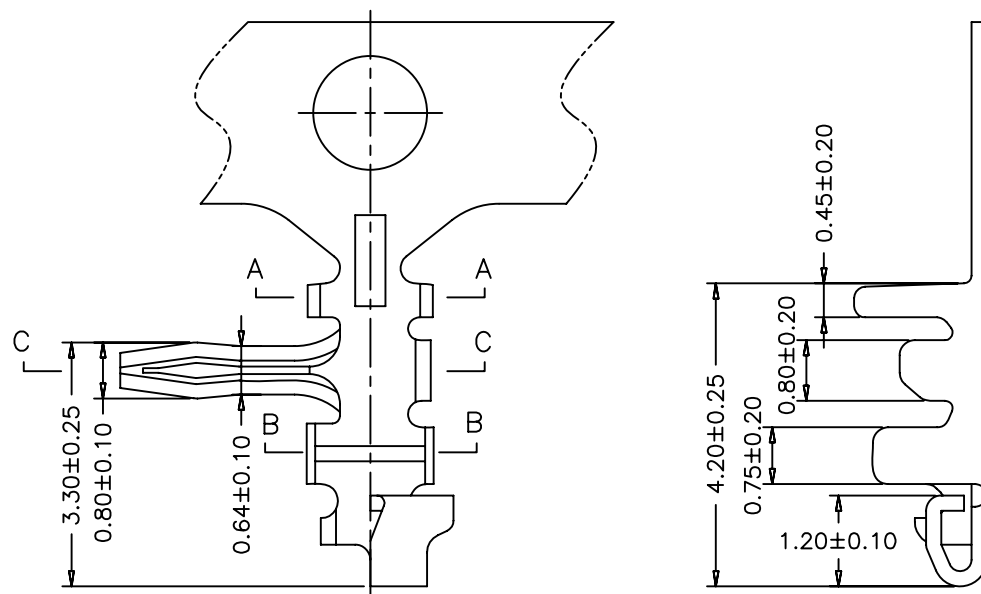

A-A



B-B

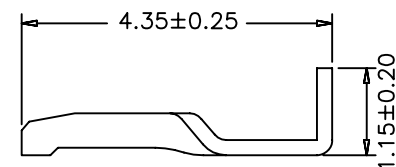

C-C

SPECIFICATIONS

Voltage rating: 200V AC, DC

Current rating: 1A, AC, DC (AWG#26)

Withstanding Voltage: 500V AC/minute

Insulation resistance: 100MΩ min

Temperature range: -25°C - +85°C

Contact resistance: 20mΩ max

TERMINAL

Part No: SCT1502TRA

Thickness: 0.20mm

Material: Phosphor bronze

Wire Range: AWG#28-#32 (OD1.0mm)

Q' TY: 15000 pcs/reel

					OPERATION	DRAW	Judy Luo	05/12/25	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30					SIZE	A4	PART NO.
0	05/12/27	NEW			30 ~ ±0.50	CHECK	Micky	05/12/25	SHEET	1/1	TITLE:	SZN1.5 90C TERMINAL
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM TOL	APPROVE	Hellen	05/12/25	PROJ.		DRAWING NO.	SCT1502

1 2 3 4 5 6 7 8 9 10