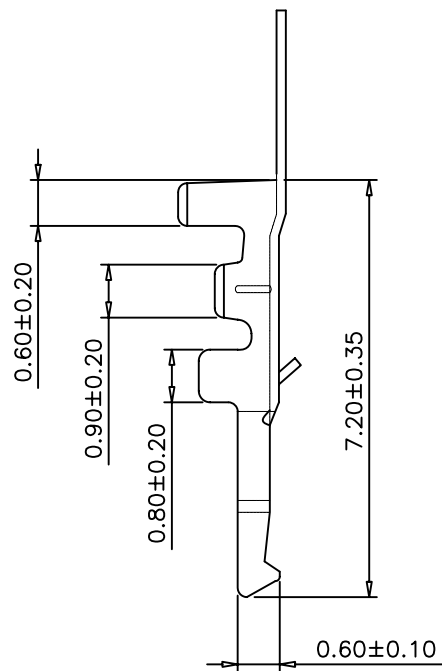
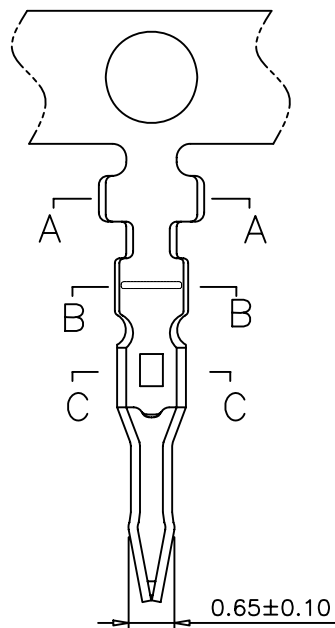


SPECIFICATIONS

Voltage rating: 200V AC, DC
 Current rating: 1A, AC, DC (AWG#26)
 Withstanding Voltage: 500V AC/minute
 Insulation resistance: 100MΩ min
 Temperature range: -25°C - +85°C
 Contact resistance: 20mΩ max

TERMINAL

Part No: SCT1502TV
 Thickness: 0.20mm
 Material: Phosphor bronze
 Wire Range: AWG#28-#32 (OD1.0mm)
 Q' TY: 15000 pcs/reel

					OPERATION	DRAW	Judy Luo	05/12/25	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30				SIZE	A4		PART NO. SCT1502TVA
0	05/12/27	NEW			30 ~ ±0.50		Micky	05/12/25	SHEET	1/1		TITLE: SZN1.5 180C TERMINAL
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM TOL	APPROVE	Hellen	05/12/25	PROJ.	 DRAWING NO.		SCT1502