
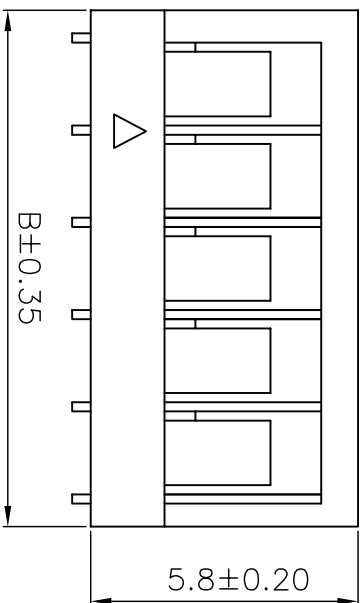


PCB LAYOUT

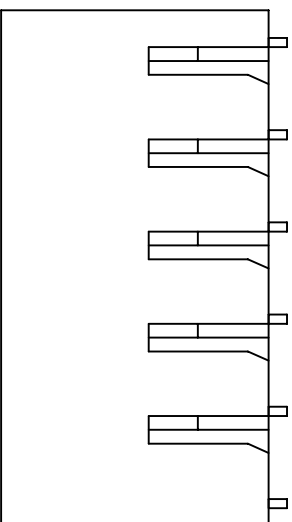

SPECIFICATIONS

Voltage Rating: 250V AC/DC
Current rating: 2A AC/DC
Withstanding Voltage: 800V AC/minute
Insulation resistance: 1,000M Ω min
Temperature range: -25° C- +85° C
Contact Resistance: 20m Ω max

HOUSING

Part No: SCT2003HR-XXP

Poles: 2-16

Material: Nylon 66 UL94V-2

PART NO.	Dimension	
	A	B
SCT2003HR-02	2.00	5.20
SCT2003HR-03	4.00	7.20
SCT2003HR-04	6.00	9.20
SCT2003HR-05	8.00	11.20
SCT2003HR-06	10.00	13.20
SCT2003HR-07	12.00	15.20
SCT2003HR-08	14.00	17.20
SCT2003HR-09	16.00	19.20
SCT2003HR-10	18.00	21.20
SCT2003HR-11	20.00	23.20
SCT2003HR-12	22.00	25.20
SCT2003HR-13	24.00	27.20
SCT2003HR-14	26.00	29.20
SCT2003HR-15	28.00	31.20
SCT2003HR-16	30.00	33.20

				OPERATION		DRAW		SCALE	
				~ 10 ± 0.15		Judy.Huang		2006/05/02	
				DESIGN				UNIT	
				20 ~ 30 ± 0.30				mm	
				30 ~ ± 0.50		CHECK		SIZE	
				Angle ± 2°		Micky.Liu		A4	
				DIM		Hellen.Li		SHEET	
				TOL		2006/05/02		1/1	
				APPROVE		PROJ.		DRAWING NO.	
								SCT2003	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

H

0 05/12/27

NEW

REV DATE

MODIFICATION DESCRIPTION

CHANGE APPROVE

1

2

3

4

5

6

7

8

9

10

1

2

3

4

5

6

7

8

9

10