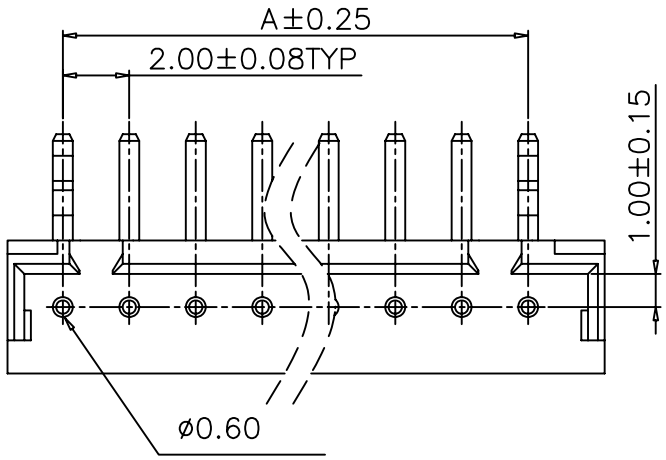

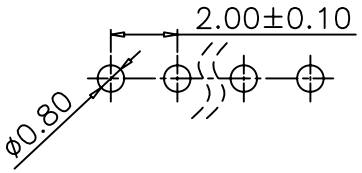

P.C.B LAYOUT



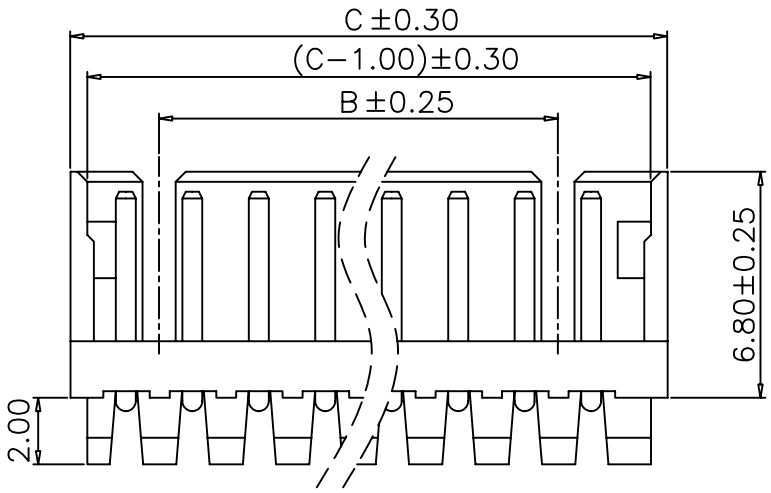

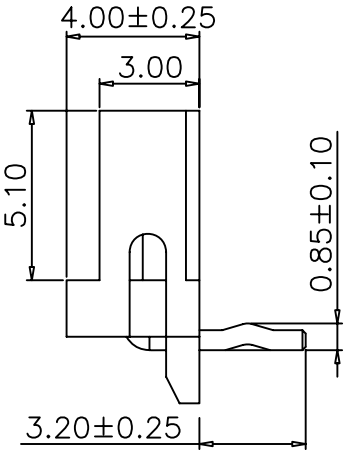

SPECIFICATIONS

Voltage Rating: 100V AC/DC
Current Rating: 1A AC/DC
Withstanding Voltage: 800V AC/minute
Insulation Resistance: 1,000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2007WR-XXP
Poles: 2-15
Material: Nylon 66, UL94V-0
Pin: Brass, Tin plated

PART NO.	Dimensions		
	A	B	C
SCT2007WR-02P	2.00		5.96
SCT2007WR-03P	4.00		7.96
SCT2007WR-04P	6.00	4.00	9.96
SCT2007WR-05P	8.00	6.00	11.96
SCT2007WR-06P	10.00	8.00	13.96
SCT2007WR-07P	12.00	10.00	15.96
SCT2007WR-08P	14.00	12.00	17.96
SCT2007WR-09P	16.00	14.00	19.96
SCT2007WR-10P	18.00	16.00	21.96
SCT2007WR-11P	20.00	18.00	23.96
SCT2007WR-12P	22.00	20.00	25.96
SCT2007WR-13P	24.00	22.00	27.96
SCT2007WR-14P	26.00	24.00	29.96
SCT2007WR-15P	28.00	26.00	31.96

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION		DRAW	Judy.Huang	2006/05/02
~ 10	±0.15	DESIGN		
20 ~ 30	±0.30			
30 ~	±0.50	CHECK	Micky.Liu	2006/05/02
Angle	± 2°	APPROVE	Hellen.Li	2006/05/02
DIM	TOL			

SCALE		SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
UNIT	mm		
SIZE	A4	PART NO.	SCT2007WR-XXP
SHEET	1/1	TITLE:	AMP2.0 90C WAFER
PROJ.		DRAWING NO.	SCT2007