


SPECIFICATIONS

Voltage Rating: 125V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2008FH-XXPB
 Poles: 2-13
 Material: Nylon 66, UL94V-0
 Q'TY: 500, 1000 pcs/bag

PART NO.	Dimensions		
	A	B	C
SCT2008FH-02PB	2.00	8.00	4.60
SCT2008FH-03PB	4.00	10.00	6.60
SCT2008FH-04PB	6.00	12.00	8.60
SCT2008FH-05PB	8.00	14.00	10.60
SCT2008FH-06PB	10.00	16.00	12.60
SCT2008FH-07PB	12.00	18.00	14.60
SCT2008FH-08PB	14.00	20.00	16.60
SCT2008FH-09PB	16.00	22.00	18.60
SCT2008FH-10PB	18.00	24.00	20.60
SCT2008FH-11PB	20.00	26.00	22.60
SCT2008FH-13PB	24.00	30.00	26.60

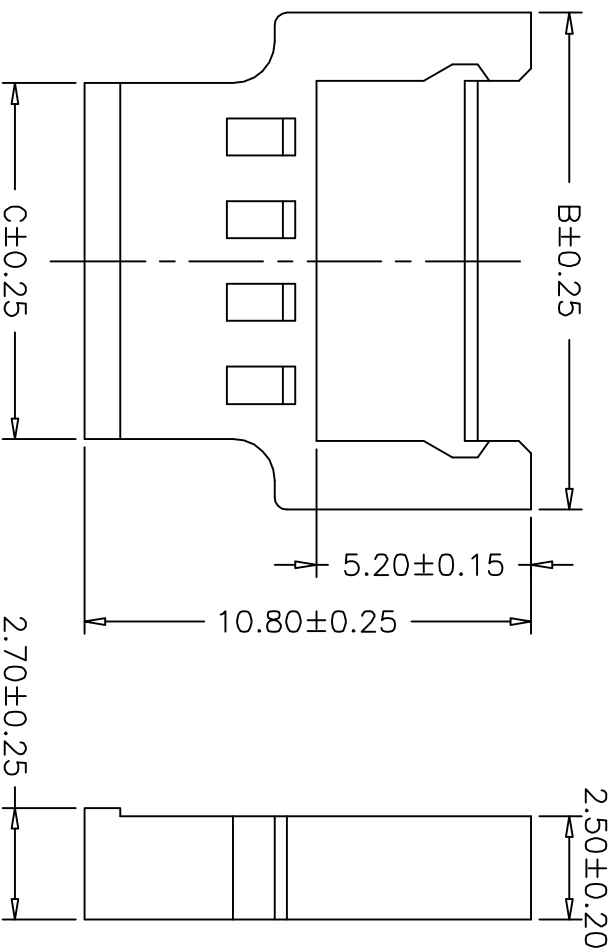

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	SCALE	UNIT	PART NO.	TITLE:	DRAWING NO.
0	05/12/27	NEW			~ 10 ± 0.15	DESIGN		A4	mm	SCT2008FH-XXPB	MX51006 Female Housing	SCT2008
					20 ~ 30 ± 0.30	CHECK	Micky.Liu	1/1				
					30 ~ Angle DIM	APPROVE	Allen	PROJ.				
					± 2 TOL							

森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

1 2 3 4 5 6 7 8 9 10