
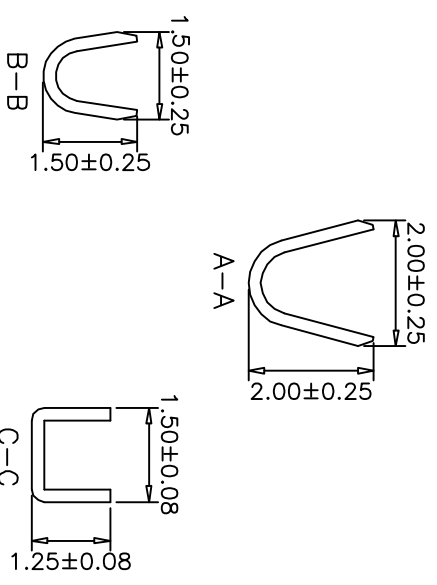


SPECIFICATIONS
 Voltage Rating: 125V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2008MTP
 Wire Range: AWG#24-#28 (OD1.15mm)
 Material: Phos. Bronze
 Finish: Tin Plated
 Thickness: 0.2mm
 Q'TY: 17,000PCS/Reel

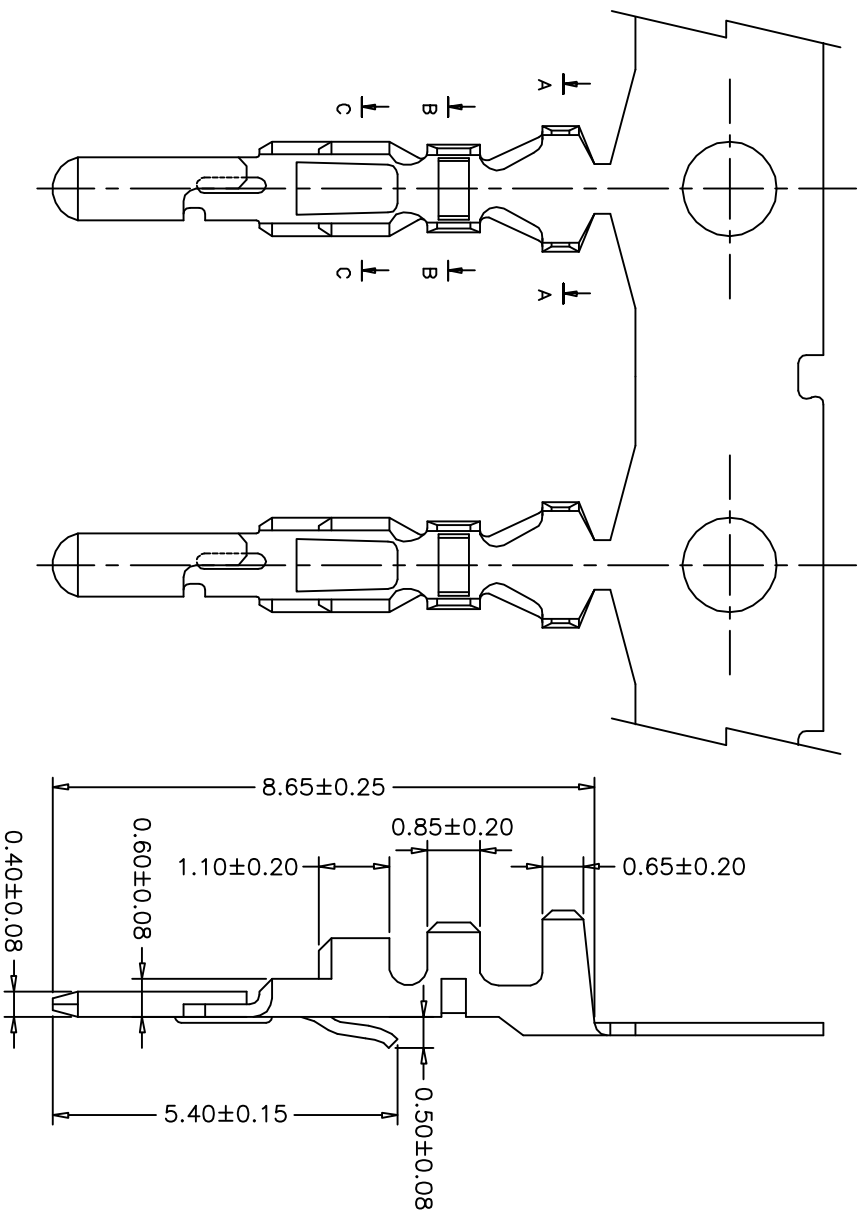

OPERATION		DRAW		YANG		SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
~ 10 ±0.15		DESIGN				UNIT			
20 ~ 30 ±0.30		CHECK		MICKY		SIZE			
30 ~ ±0.50		APPROVE		ALLEN		SHEET		PART NO.	
Angle ± 2'		APPROVE		2016.10.31		PROJ.		TITLE:	
DIM TOL		APPROVE		2016.10.31		DRAWING NO.		MX51006 MALE TERMINAL	
NEW		CHANGE		2016.10.31		SCT2008MTP		SCT2008	
MODIFICATION DESCRIPTION		APPROVE							
0 05/12/27									
REV DATE									