
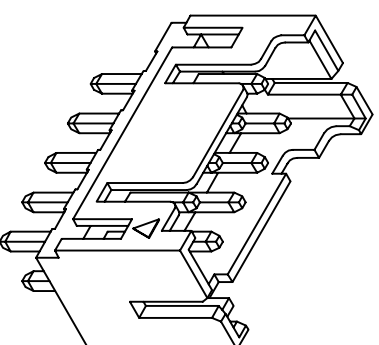
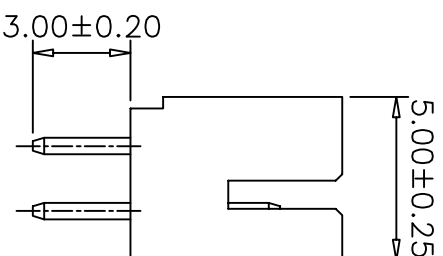


P.C.B LAYOUT

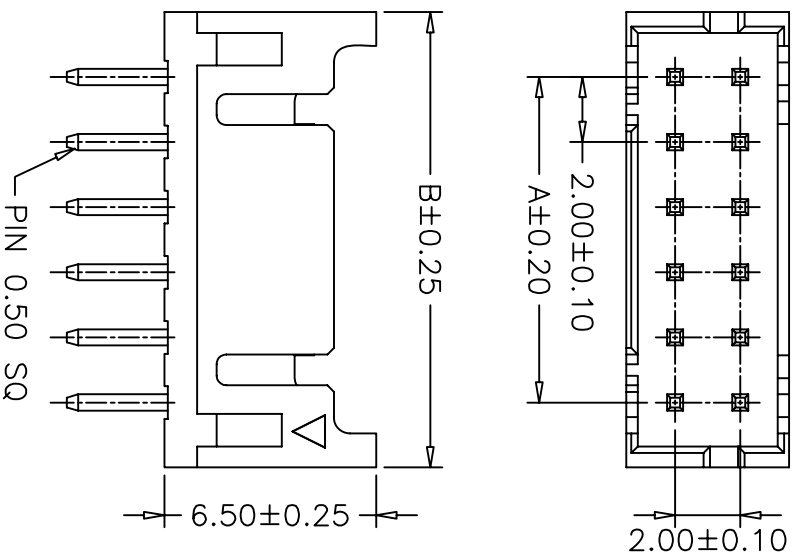

SPECIFICATIONS

Voltage Rating: 250V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 800V AC/minute
Insulation Resistance: 100MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

WAFER

Part No: SCT2011WV-2xXXP
Poles: 2x2-20
Material: Nylon 66, UL94V-0
Pin: Brass, Tin plated

PART NO.	Dimensions	
	A	B
SCT2011WV-2X02P	2.00	6.00
SCT2011WV-2X03P	4.00	8.00
SCT2011WV-2X04P	6.00	10.00
SCT2011WV-2X05P	8.00	12.00
SCT2011WV-2X06P	10.00	14.00
SCT2011WV-2X07P	12.00	16.00
SCT2011WV-2X08P	14.00	18.00
SCT2011WV-2X09P	16.00	20.00
SCT2011WV-2X10P	18.00	22.00
SCT2011WV-2X11P	20.00	24.00
SCT2011WV-2X12P	22.00	26.00
SCT2011WV-2X13P	24.00	28.00
SCT2011WV-2X14P	26.00	30.00
SCT2011WV-2X15P	28.00	32.00
SCT2011WV-2X16P	30.00	34.00
SCT2011WV-2X17P	32.00	36.00
SCT2011WV-2X18P	34.00	38.00
SCT2011WV-2X19P	36.00	40.00
SCT2011WV-2X20P	38.00	42.00

OPERATION		DRAW		SCALE	
~ 10	±0.15	DESIGN	JUDY	UNIT	mm
20 ~ 30	±0.30	CHECK	MICKY	SIZE	A4
30 ~	±0.50	CHECK	MICKY	SHEET	1/1
Angle	± 2°	APPROVE	HELLEN	PROJ.	◆
DIM	TOL	APPROVE	HELLEN	DRAWING NO.	SCT2011
DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DATE	05/12/27
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DATE

SCONDA 森康达电子有限公司
SCONDA ELECTRONIC LIMITED

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

9

10

H

G

F

E

D

C

B

A