
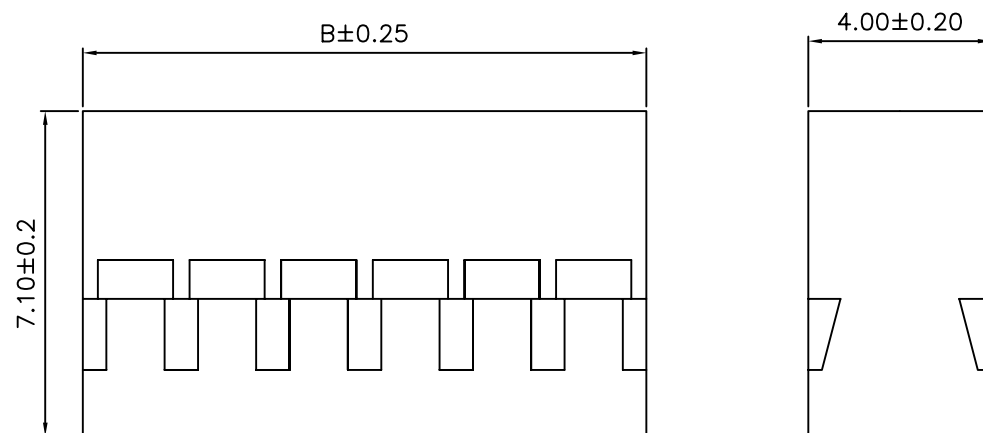


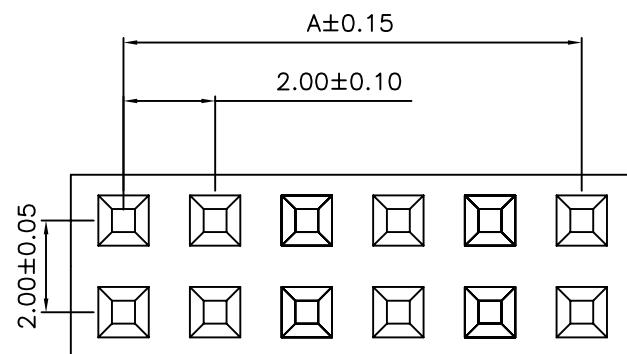

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 3A AC/DC

Withstanding Voltage: 1000V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2015H-2xXXP

Poles: 2x2-25

Material: PBT

PART NO.	Dimensions	
	A	B
SCT2015H-2x02P	2.00	4.30
SCT2015H-2x03P	4.00	6.30
SCT2015H-2x04P	6.00	8.30
SCT2015H-2x05P	8.00	10.30
SCT2015H-2x06P	10.00	12.30
SCT2015H-2x 20P	38.00	40.30
SCT2015H-2x 21P	40.00	42.30
SCT2015H-2x 22P	42.00	44.30
SCT2015H-2x 23P	44.00	46.30
SCT2015H-2x 24P	46.00	48.30
SCT2015H-2x 25P	48.00	50.30

					OPERATION	DRAW	JUDY	2006.05.09	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30				SIZE	A4	PART NO.	SCT2015H—2xXXP
0	05/12/27	NEW	_____	_____	30 ~ ±0.50	CHECK	MICKY	2006.05.09	SHEET	1/1	TITLE:	Dupont 2.0 Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2' DIM TOL	APPROVE	HELLEN	2006.05.09	PROJ.		DRAWING NO.	SCT2015