
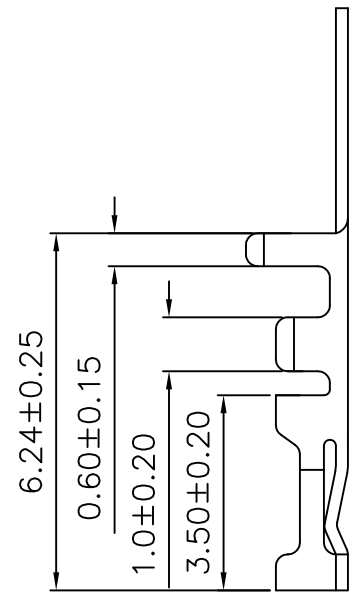


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H




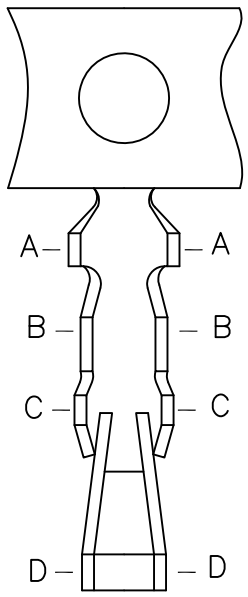


SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2015T
 Wire Range: AWG#24-#28 (OD1.5mm)
 Material: Phos. Bronze
 Finish: Tin Plated
 Thickness: 0.2mm
 Q'TY: 10,000PCS/Reel

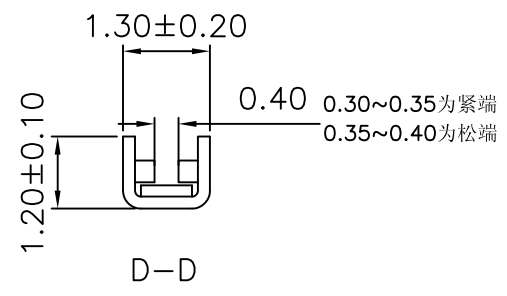

						OPERATION	DRAW	JUDY	2006.05.09	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	2006.05.09	SIZE	A4	PART NO.	SCT2015T
0	05/12/27		NEW			30 ~ ±0.50	APPROVE	HELLEN	2006.05.09	SHEET	1/1	TITLE:	Dupont2.0 Terminal
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	HELLEN	2006.05.09	PROJ.		DRAWING NO.	SCT2015

1 2 3 4 5 6 7 8 9 10