

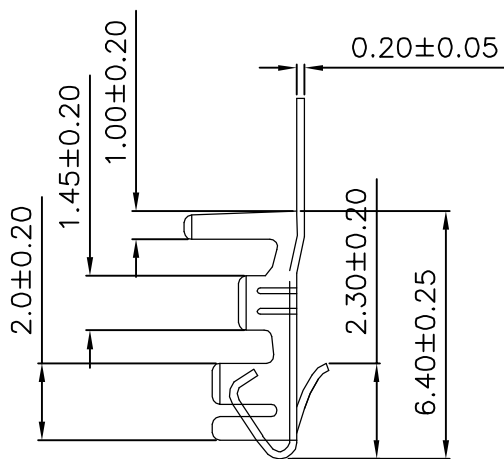


SPECIFICATIONS


Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25°C - +85°C
 Contact Resistance: 20mΩ max

TERMINAL


Part No: SCT2501TP
 Wire Range: AWG#22-#28
 Material: Phos. Bronze
 Finish: Tin Plated
 Thickness: 0.2mm H
 Q'TY: 7,000PCS/Reel

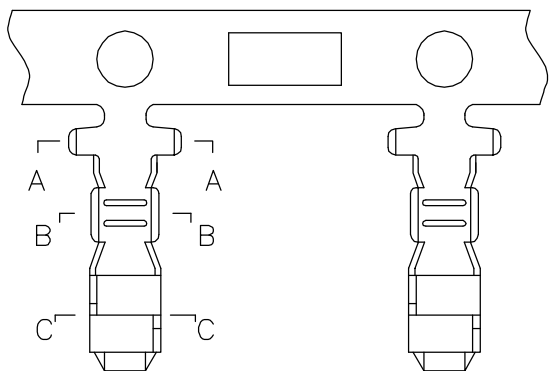


A-A



B-B

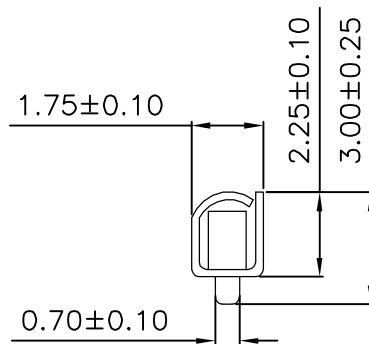

C-C

						OPERATION	DRAW	CHENA	05/12/27	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	05/12/28	SIZE	A4	PART NO.	SCT2501TP
0	05/12/27	NEW				30 ~ ±0.50	APPROVE	HELLEN	05/12/28	SHEET	1/1	TITLE:	XH2.5 TERMINAL
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE				PROJ.	⌀	DRAWING NO.	SCT2501T