


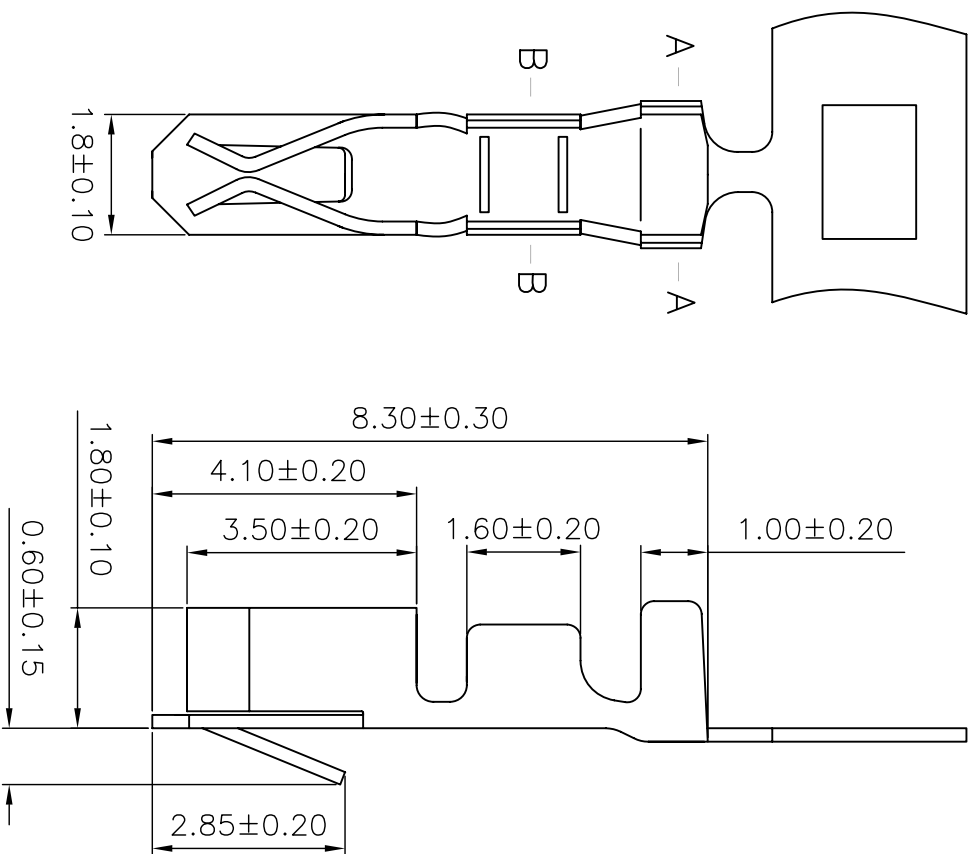

A-A

B-B

SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 500V AC/minute
Insulation Resistance: 800MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

TERMINAL
Part No: SCT2509FT
Wire Range: AWG#22-#28 (OD1.8mm)
Material: Brass
Finish: Tin Plated
Thickness: 0.2mm
Q'TY: 8,000PCS/Reel

							森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
			OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE	
			~ 10 ±0.15	DESIGN			UNIT	mm
			20 ~ 30 ±0.30				SIZE	A4
			30 ~ ±0.50	CHECK	Micky.Liu	2006/05/02	SHEET	1/1
0	05/12/27	NEW	_____	APPROVE	Hellen.Li	2006/05/02		 DRAWING NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE				