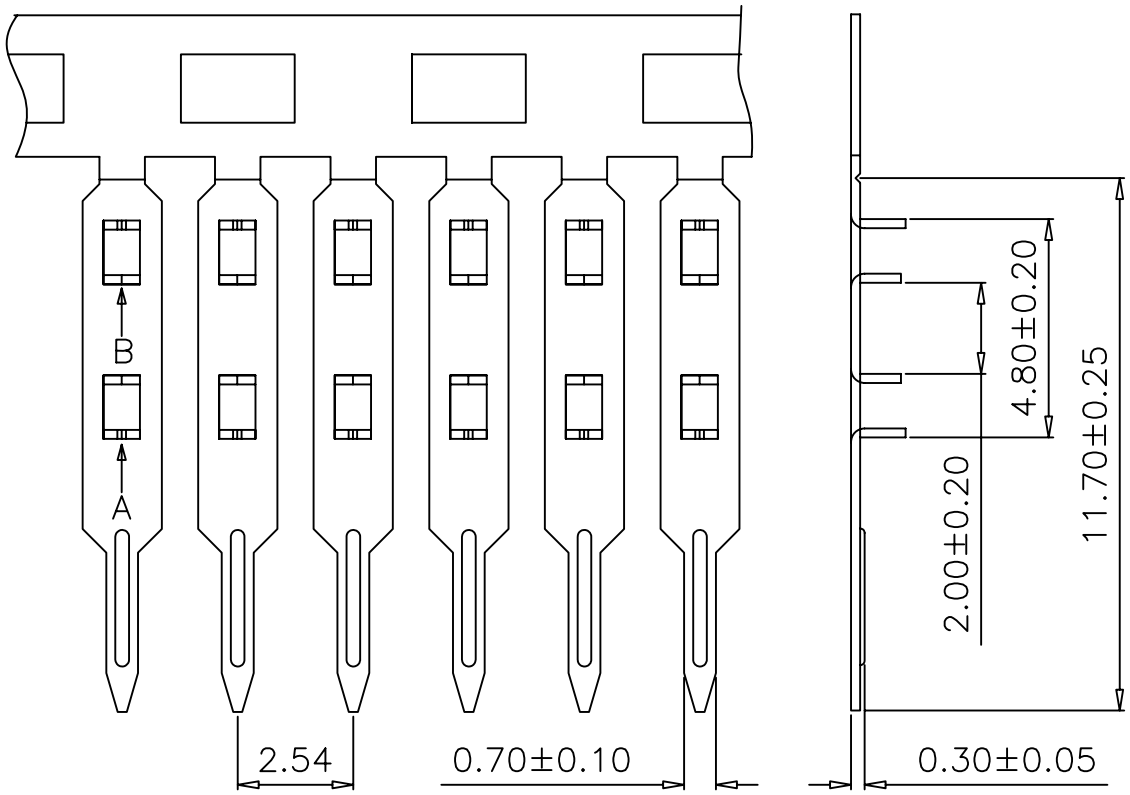

SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 500V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

TERMINAL
Part No: SCT2540MT
Material: Phosphor Bronze
Finish: Tin Plated
Thickness: 0.2mm
Q'TY: 20,000PCS/Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	Judy.Huang	2006/05/02
DESIGN		
CHECK	Micky.Liu	2006/05/02
APPROVE	Hellen.Li	2006/05/02

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

PART NO.	SCT2540MT
TITLE:	AMP543 MALE TERMINAL
DRAWING NO.	SCT2540