
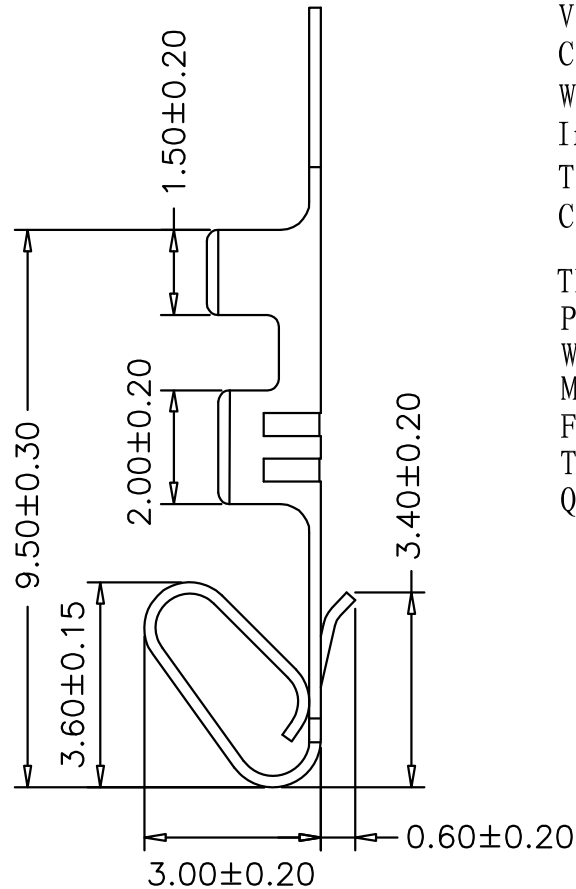


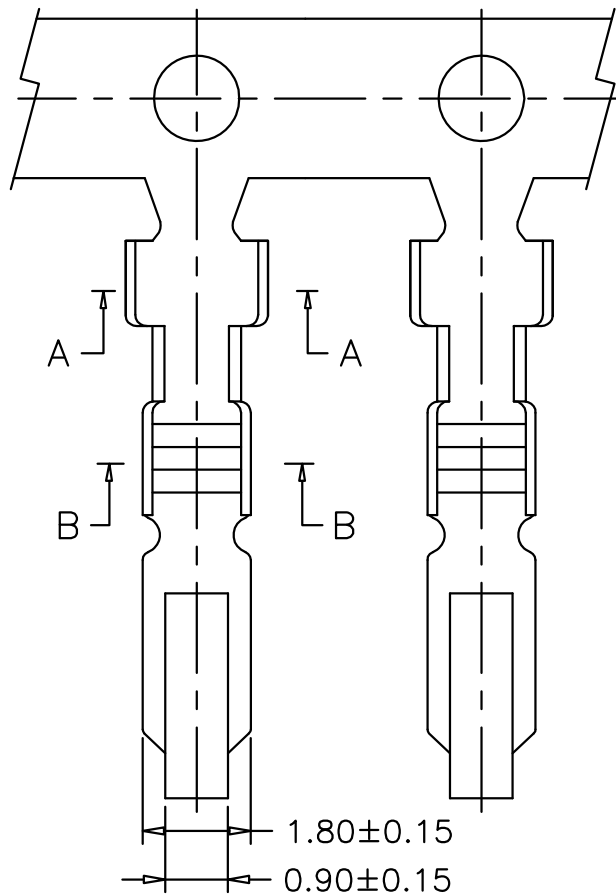

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 4A AC/DC

Withstanding Voltage: 1000V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2541T



Wire Range: AWG#24-#28 (OD1.55mm)

Material: Brass

Finish: Tin Plated

Thickness: 0.2mm

Q'TY: 10,000PCS/Reel



					OPERATION		DRAW	CHENA	05/12/28	SCALE			森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
					~ 10	±0.15	DESIGN			UNIT	mm			
					20 ~ 30	±0.30				SIZE	A4			
0	05/12/27	NEW				30 ~	±0.50	CHECK	MICKY	05/12/28	SHEET	1/1	TITLE:	MX2.54 TERMINAL
						Angle	± 2'	APPROVE	HELLEN	05/12/28	PROJ.		DRAWING NO.	SCT2541
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL							