
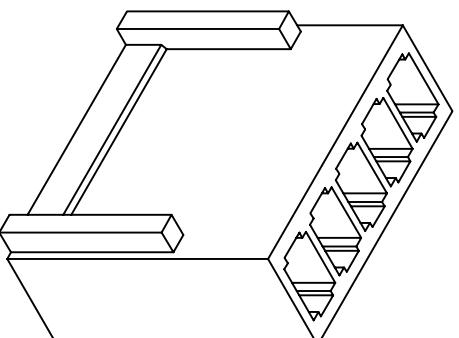


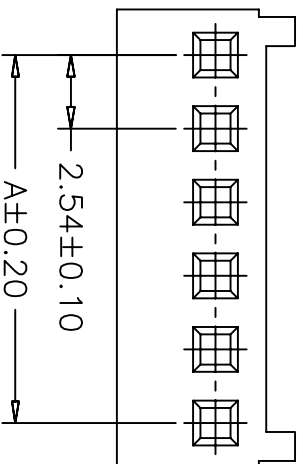

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 4A AC/DC

Withstanding Voltage: 1000V AC/minute

Insulation Resistance: 1000M Ω min.

Temperature Range: -25°C - $+85^{\circ}\text{C}$


Contact Resistance: 20m Ω max

HOUSING

Part No: SCT2541H-XXP

Poles: 2-20

Material: Nylon 66, UL94V-2

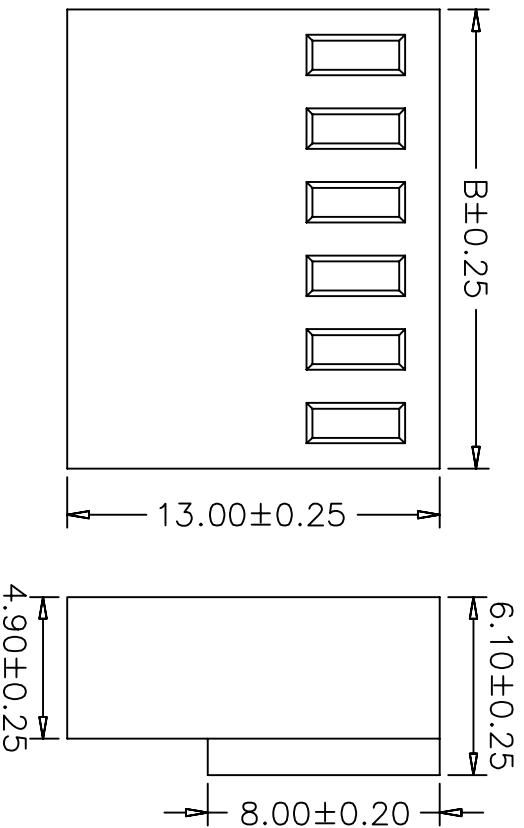

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
SCT2541H-02P	2.54	5.68	SCT2541H-12P	27.94	31.08
SCT2541H-03P	5.08	8.22	SCT2541H-13P	30.48	33.62
SCT2541H-04P	7.62	10.76	SCT2541H-14P	33.02	36.16
SCT2541H-05P	10.16	13.30	SCT2541H-15P	35.56	38.70
SCT2541H-06P	12.70	15.84	SCT2541H-16P	38.10	41.24
SCT2541H-07P	15.24	18.38	SCT2541H-17P	40.64	43.78
SCT2541H-08P	17.78	20.92	SCT2541H-18P	43.18	46.32
SCT2541H-09P	20.32	23.46	SCT2541H-19P	45.72	48.86
SCT2541H-10P	22.86	26.00	SCT2541H-20P	48.26	51.40
SCT2541H-11P	25.40	28.54			

[illegible]