
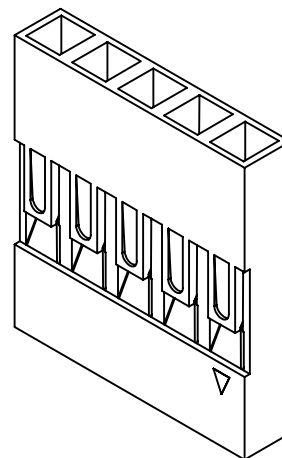


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G


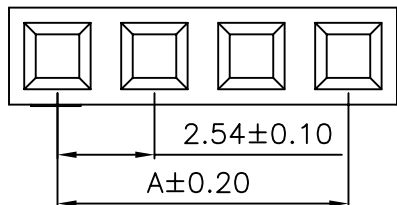


**SPECIFICATIONS**

Voltage Rating: 250V AC/DC  
 Current Rating: 3A AC/DC  
 Withstanding Voltage: 1000V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**

Part No: SCT2543H-XXP  
 Poles: 1-40  
 Material: PBT

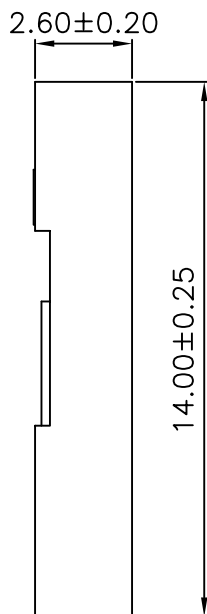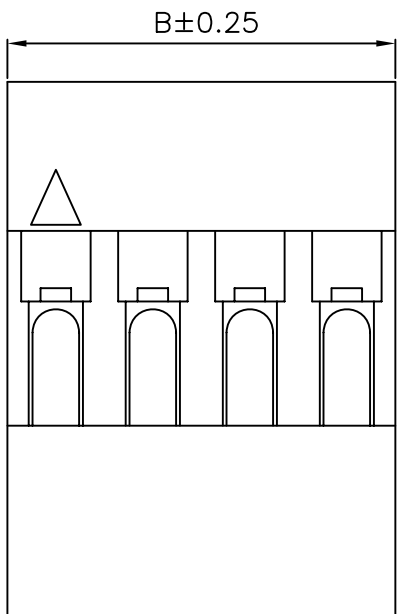

PART NO.	Dimensions	
	A	B
SCT2543H-01P	---	2.54
SCT2543H-02P	2.54	5.08
SCT2543H-03P	5.08	7.62
SCT2543H-04P	7.62	10.16
SCT2543H-05P	10.16	12.70
SCT2543H-39P	96.52	99.06
SCT2543H-40P	99.06	101.60

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT2543H-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	DUpont2.54 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.	☯	DRAWING NO.	SCT2543H

1 2 3 4 5 6 7 8 9 10