


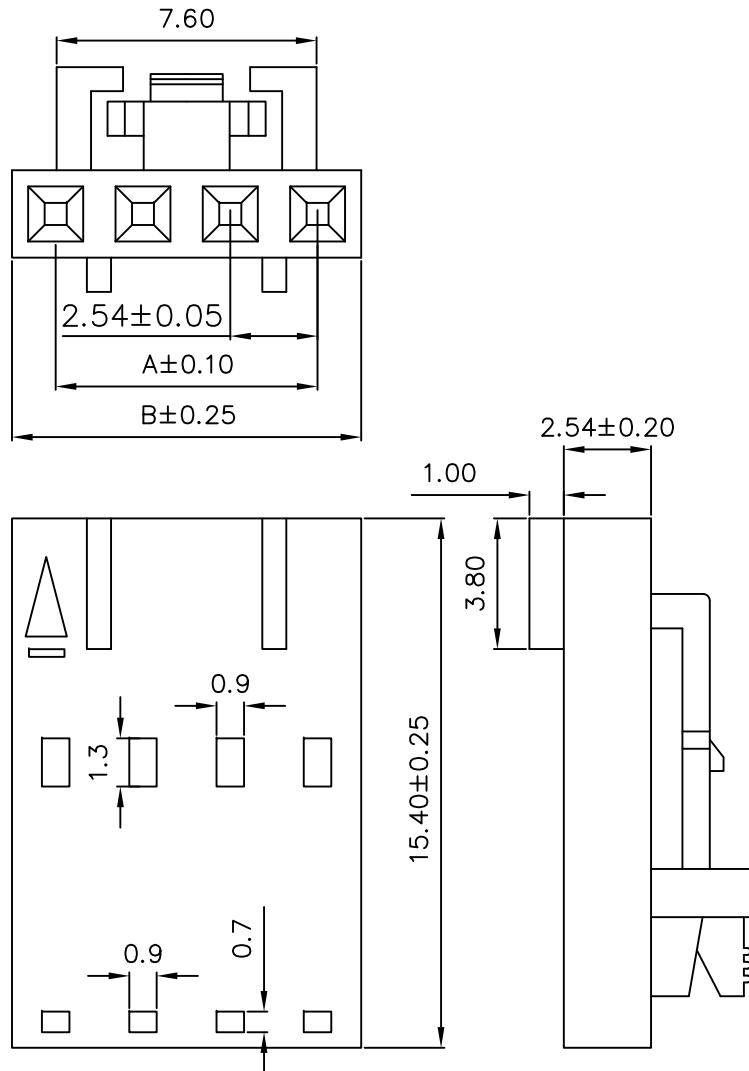

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 2A AC/DC

Withstanding Voltage: 500V AC/minute

Insulation Resistance: 1000M Ω min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20m Ω max

HOUSING

Part No: SCT2544H-XXP

Poles: 2-10

Material: PA66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT2544H-02P	2.54	5.08
SCT2544H-03P	5.08	7.62
SCT2544H-04P	7.62	10.16
SCT2544H-05P	10.16	12.70
SCT2544H-06P	12.70	15.24
SCT2544H-07P	15.24	17.78
SCT2544H-08P	17.78	20.32
SCT2544H-09P	20.32	22.86
SCT2544H-10P	22.86	25.40
SCT2544H-11P	25.40	27.94
SCT2544H-12P	27.94	30.48
SCT2544H-13P	30.48	33.02
SCT2544H-14P	33.02	35.56
SCT2544H-15P	35.56	38.10
SCT2544H-16P	38.10	40.64
SCT2544H-17P	40.64	43.18
SCT2544H-18P	43.18	45.72
SCT2544H-19P	45.72	48.26
SCT2544H-20P	48.26	50.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.05.19	SCALE	UNIT	mm	PART NO.	SCT2544H-XXP
0	05/12/27	NEW			~ 10	±0.15	DESIGN						
					20 ~ 30	±0.30	CHECK	MICKY	2016.05.19				
					30 ~	±0.50	APPROVE	ALLEN	2016.05.19				
					Angle	± 2°							
					DIM	TOL							

SCONDA 森康达电子有限公司
SCONDA ELECTRONIC LIMITED

PART NO. SCT2544H-XXP
TITLE: MX2.54 CD-ROM HOUSING
DRAWING NO. SCT2544H