
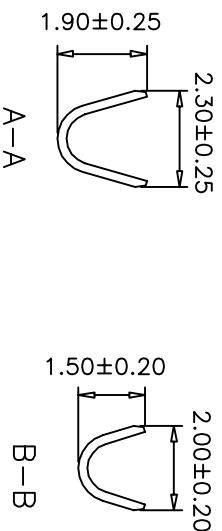
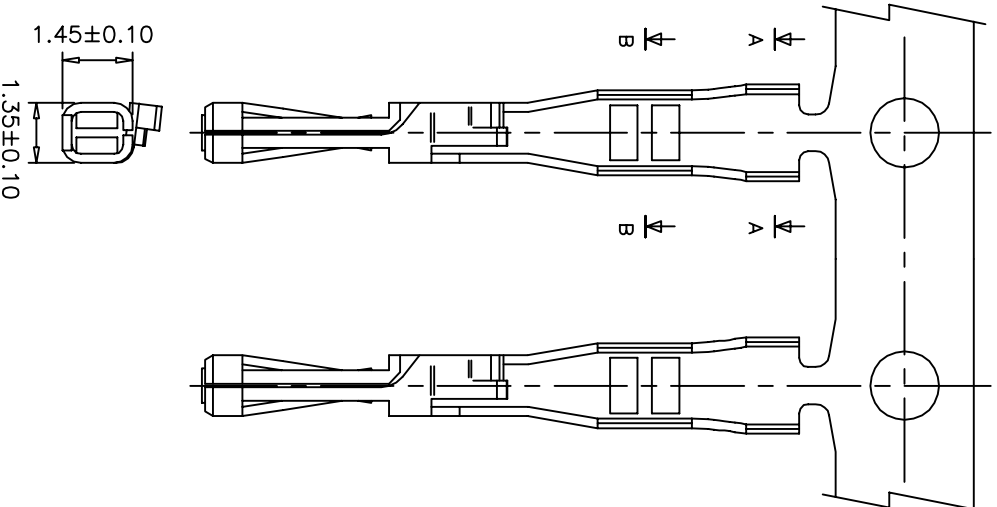


1 2 3 4 5 6 7 8 9 10

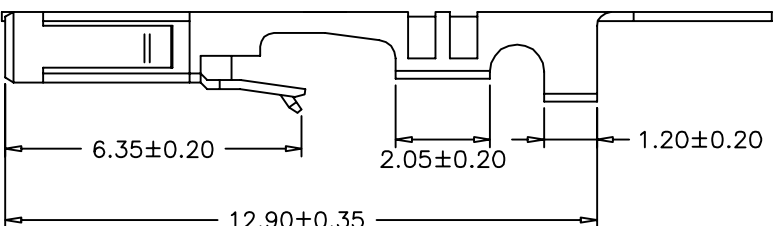

SPECIFICATIONS

Voltage Rating: 250V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 500V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2544T
Wire Range: AWG#22-#28 (OD1.6mm)
Material: Phos. Bronze
Finish: Tin Plated
Thickness: 0.2mm
Q\TY: 10,000PCS/Reel

						SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED				
				OPERATION	DRAW	CHENA	2010.02.11	SCALE		
				~ 10 ±0.15	DESIGN			UNIT	mm	
				20 ~ 30 ±0.30				SIZE	A4	
0	05/12/27	NEW	————	30 ~ ±0.50	CHECK	MICKY	2010.02.11	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	HELLEN	2010.02.11	PROJ.	DRAWING NO.	
				Angle ± 2° DIM	TOL					

1 2 3 4 5 6 7 8 9 10