

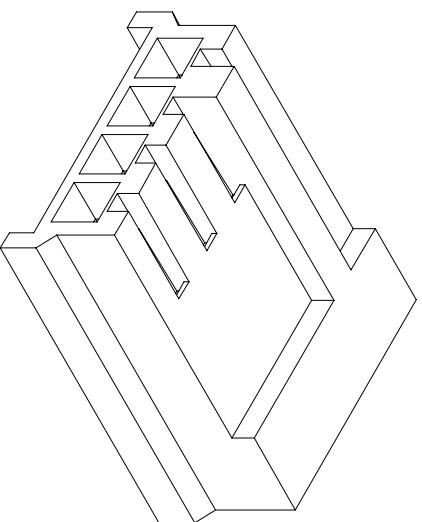
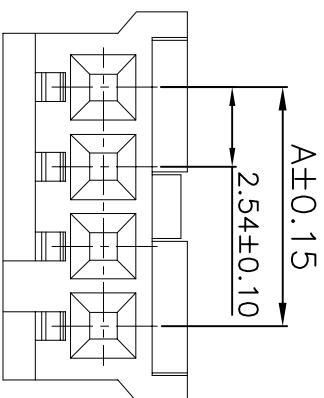


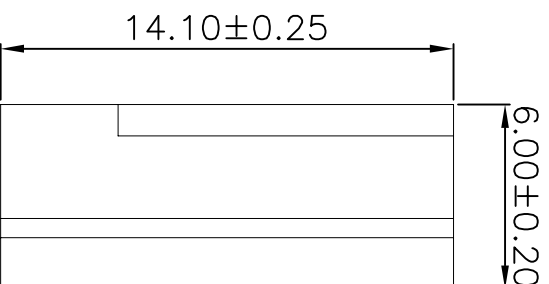

SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 500MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT2545H-04P
 Poles: 04
 Material: PA66, UL94V-0

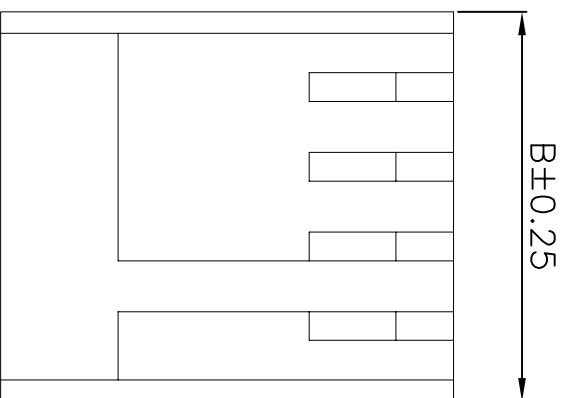

PART NO	DIMENSION		
	A	B	C
SCT2545H-02	2.5	7.3	...
SCT2545H-03	5.0	9.8	...
SCT2545H-04	7.5	12.3	...
SCT2545H-05	10.0	14.8	...
SCT2545H-06	12.5	17.3	...
SCT2545H-07	15.0	19.8	...
SCT2545H-08	17.5	22.3	...
SCT2545H-09	20.0	24.8	...
SCT2545H-10	22.5	27.3	...
SCT2545H-11	25.0	29.8	...
SCT2545H-12	27.5	33.3	...

0	05/12/27	NEW							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	CHENA	SCALE	森康达电子有限公司 SCONDAR ELECTRONIC LIMITED
					~ 10° ±0.15	DESIGN		UNIT mm	
					20 ~ 30 ±0.30	CHECK		SIZE A4	PART NO. SCT2545H-04P
					30 ~ Angle ± 2° ±0.50	CHECK	MICKY	SHEET 1/1	TITLE: SCT2545H-04P
					DIM TOL	APPROVE	HELLEN	PROJ.	DRAWING NO. SCT2545H
1									