


SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 500MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL
 Part No: SCT2545T
 Wire Range: AWG#20-#26 (OD1.9mm)
 Material: Phos. Bronze
 Finish: Tin Plated
 Thickness: 0.2mm
 Q\TY: 10, 000PCS/Reel

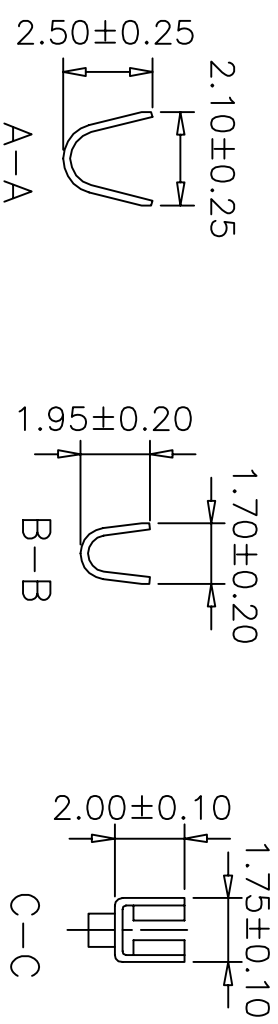

OPERATION		DRAW		CHENA		SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
~ 10 ±0.15		DESIGN				mm			
20 ~ 30 ±0.30		CHECK		MICKY		SIZE A4		PART NO. SCT2545T	
30 ~ Angle ± 2° DIM TOL		APPROVE		HELLEN		SHEET 1/1		TITLE: AMP171822 Terminal	
DATE		CHANGE		APPROVE		PROJ.		DRAWING NO. SCT2545T	
05/12/27		NEW							
REV		MODIFICATION DESCRIPTION							
0									
1									