

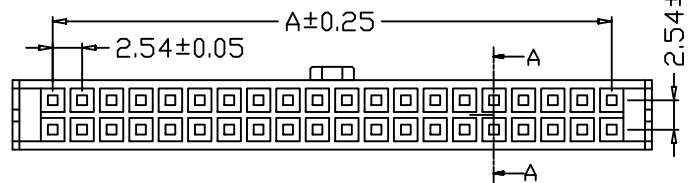


1 2 3 4 5 6 7 8 9 10

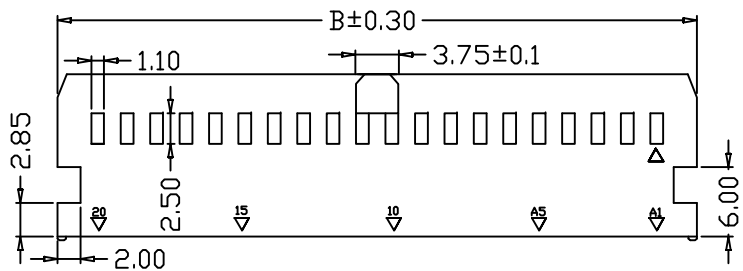


Section: A-A

SPECIFICATIONS

Voltage Rating: 250V AC/DC
Current Rating: 3A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2549H-2xXXP
Poles: 4-64P
Material: PBT

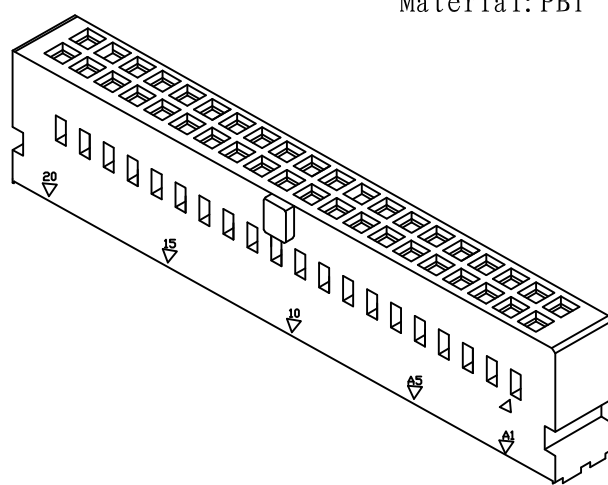

Poles	Part No.	Dimensions(mm)	
		A	B
4	SCT2549H-2x 2P	2.54	9.48
6	SCT2549H-2x 3P	5.08	12.02
8	SCT2549H-2x 4P	7.62	14.56
10	SCT2549H-2x 5P	10.16	17.10
12	SCT2549H-2x 6P	12.7	19.64
14	SCT2549H-2x 7P	15.24	22.18
16	SCT2549H-2x 8P	17.78	24.72
18	SCT2549H-2x 9P	20.32	27.26
20	SCT2549H-2x 10 P	22.86	29.80
22	SCT2549H-2x 11 P	25.4	32.34
24	SCT2549H-2x 12 P	27.94	34.88
26	SCT2549H-2x 13 P	30.48	37.42
28	SCT2549H-2x 14 P	33.02	39.96
30	SCT2549H-2x 15 P	35.56	42.50
32	SCT2549H-2x 16 P	38.1	45.04
34	SCT2549H-2x 17 P	40.64	47.58
36	SCT2549H-2x 18 P	43.18	50.12
38	SCT2549H-2x 19 P	45.72	52.66
40	SCT2549H-2x 20P	48.26	55.20
42	SCT2549H-2x 21P	50.8	57.74
44	SCT2549H-2x 22P	53.34	60.23
46	SCT2549H-2x 23P	55.88	62.32
48	SCT2549H-2x 24P	58.42	65.36
50	SCT2549H-2x 25P	60.96	67.90
52	SCT2549H-2x 26P	63.5	70.44
54	SCT2549H-2x 27P	66.04	72.98
56	SCT2549H-2x 28P	68.58	75.52
58	SCT2549H-2x 29P	71.12	78.06
60	SCT2549H-2x 30P	73.66	80.06
62	SCT2549H-2x 31P	76.2	83.14
64	SCT2549H-2x 32P	78.74	85.68

					OPERATION		DRAW	YANG	2016.07.12	SCALE		 森康达电子有限公司 SCONDA ELECTRONIC LIMITED	
					~ 10	±0.15	DESIGN			UNIT	mm		
					20 ~ 30	±0.30							
					30 ~	±0.50	CHECK	MICKY	2016.07.12	SIZE	A4	PART NO.	SCT2549H-2xXXP
0	05/12/27	NEW			Angle	± 2°	APPROVE	ALLEN	2016.07.12	SHEET	1/1	TITLE:	HRS 2.54
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL				PROJ.		DRAWING NO.	SCT2549H-2xXXP

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

1 2 3 4 5 6 7 8 9 10