
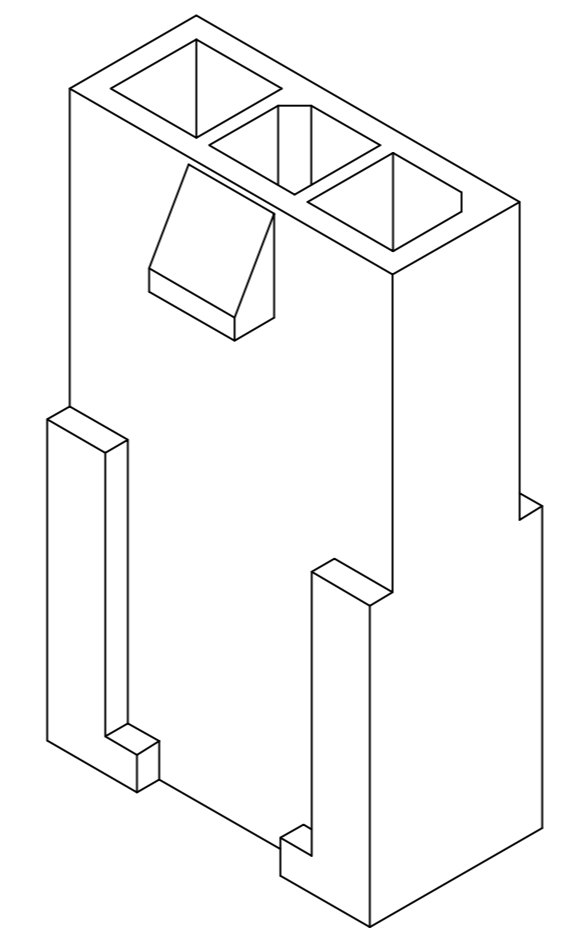


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G


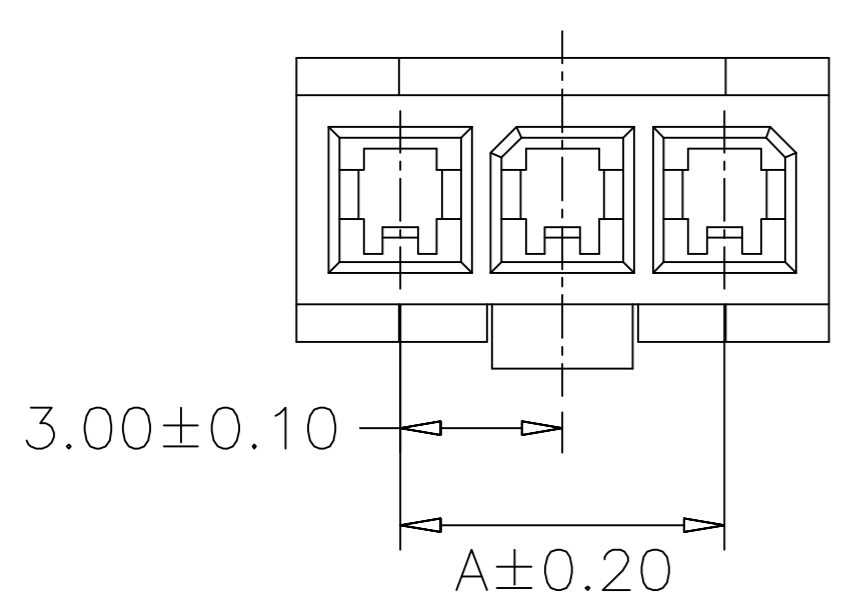


**SPECIFICATIONS**


Voltage Rating: 250V AC/DC  
 Current Rating: 5A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**

Part No: SCT3001FHA-XXP  
 Poles: 2-12  
 Material: Nylon 66, UL94V-2

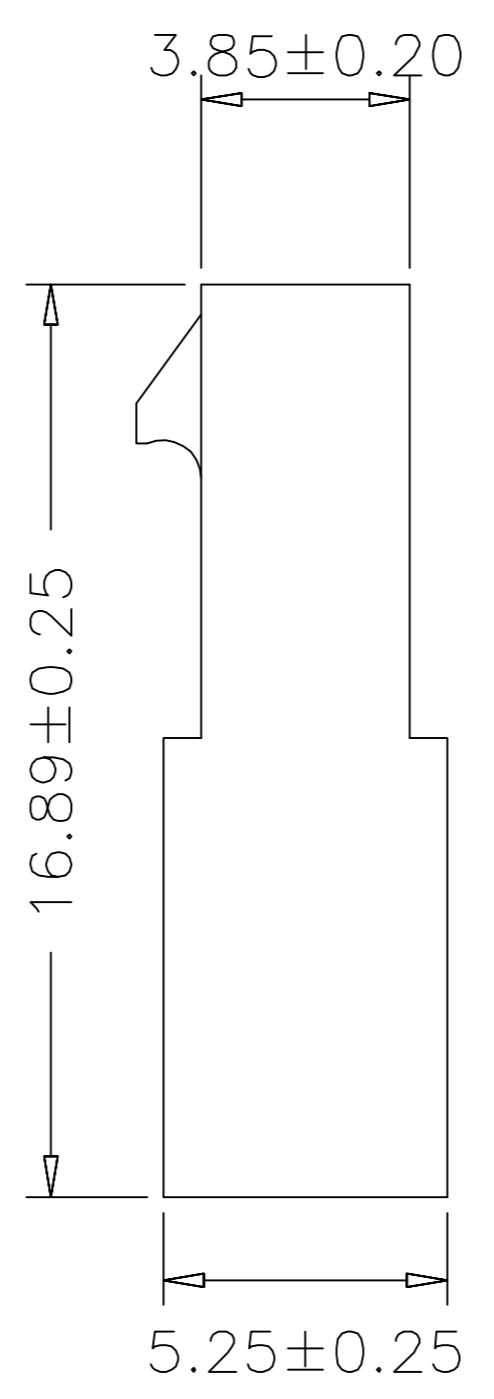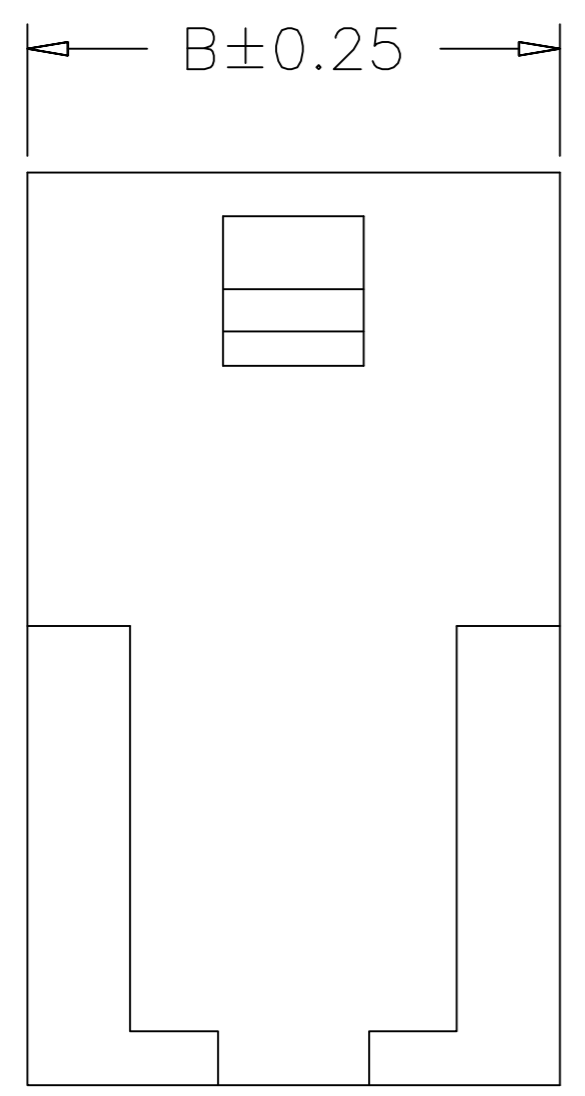

PART NO.	Dimensions	
	A	B
SCT3001FHA-2P	3.00	6.85
SCT3001FHA-3P	6.00	9.85
SCT3001FHA-4P	9.00	12.85
SCT3001FHA-5P	12.00	15.85
SCT3001FHA-6P	15.00	18.85
SCT3001FHA-7P	18.00	21.85
SCT3001FHA-8P	21.00	24.85
SCT3001FHA-9P	24.00	27.85
SCT3001FHA-10P	27.00	30.85
SCT3001FHA-11P	30.00	33.85
SCT3001FHA-12P	33.00	36.85

					OPERATION	DRAW	JUDY	2007.05.09	SCALE		 <b>森康达电子有限公司</b> S'CONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2007.05.09	SIZE	A4	PART NO.	SCT3001FHA-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2007.05.09	SHEET	1/1	TITLE:	MOLEX3.0 FEMALE HOUSING
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				PROJ.	⊕ ⊖	DRAWING NO.	SCT3001

1 2 3 4 5 6 7 8 9 10