


SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT3001FTP
 Wire Range: AWG#18-#24 (OD1. 85mm max)
 Material: Phosphor Bronze
 Finish: Tin Plated
 Thickness: 0.2mm
 Q\TY: 10, 000PCS/Reel

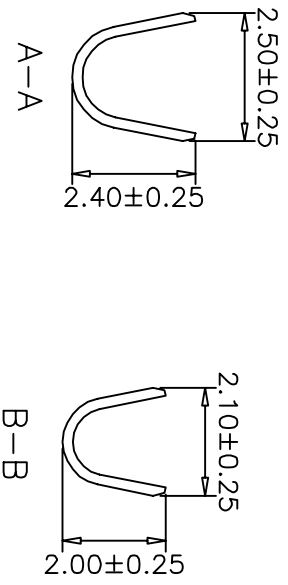

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	JUDY	2007.05.09	SCALE	UNIT	mm	PART NO.	SCT3001FTP
0	05/12/27	NEW			~ 10 ±0.15	DESIGN			SIZE	A4		MOLEX3.0 FEMALE TERMINAL	
					20 ~ 30 ±0.30	CHECK	MICKY	2007.05.09	SHEET	1/1	TITLE:	SCT3001	
					30 ~ Angle DIM	APPROVE	HELLEN	2007.05.09	PROJ.		DRAWING NO.		
					± 2'								

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED