
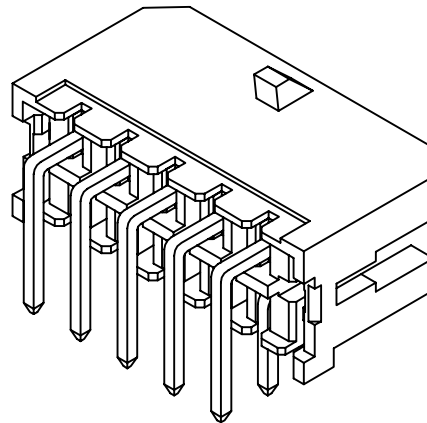
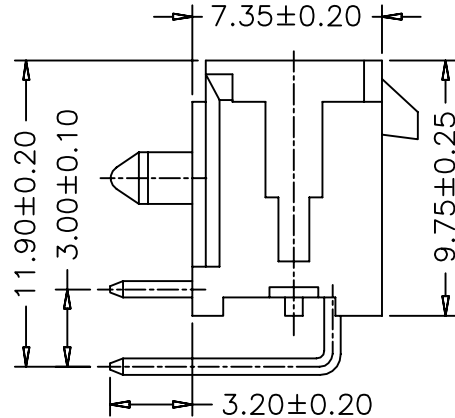
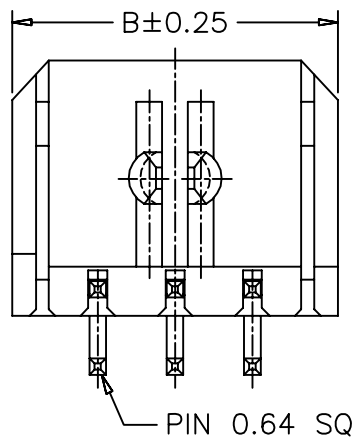
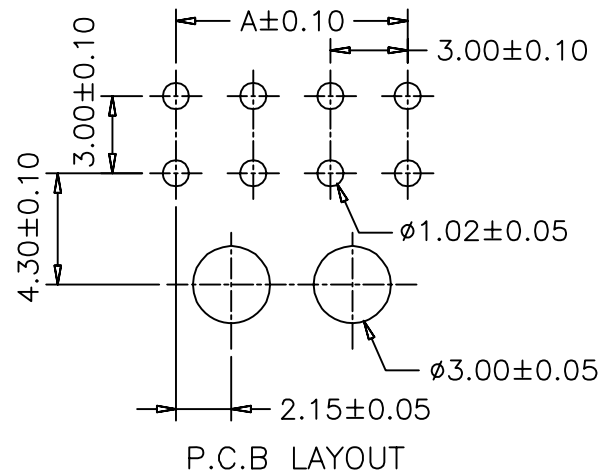


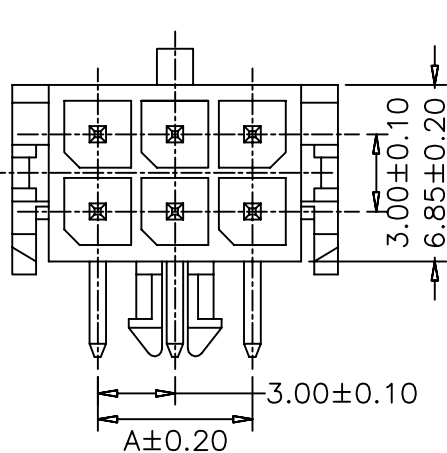

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 5A AC/DC

Withstanding Voltage: 1500V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max

WAFER

Part No: SCT3001WR-2xXXP

Poles: 2-12

Material: Nylon 66, UL94V-0

Pin: Brass, Tin plated

PART NO.	Dimensions	
	A	B
SCT3001WR-2X1P	---	6.65
SCT3001WR-2X2P	3.00	9.65
SCT3001WR-2X3P	6.00	12.65
SCT3001WR-2X4P	9.00	15.65
SCT3001WR-2X5P	12.00	18.65
SCT3001WR-2X6P	15.00	21.65
SCT3001WR-2X7P	18.00	24.65
SCT3001WR-2X8P	21.00	27.65
SCT3001WR-2X9P	24.00	30.65
SCT3001WR-2X10P	27.00	33.65
SCT3001WR-2X11P	30.00	36.65
SCT3001WR-2X12P	33.00	39.65

					OPERATION	DRAW	JUDY	2007.05.09	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2007.05.09	SIZE	A4	PART NO.	SCT3001WR-XXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	HELLEN	2007.05.09	SHEET	1/1	TITLE:	MOLEX3.0 90C WAFER
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.		DRAWING NO.	SCT3001