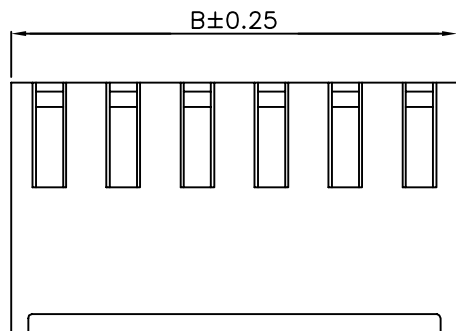
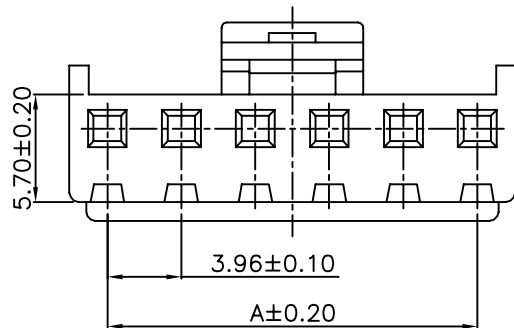


SPECIFICATIONS

Voltage Rating:250V AC/DC

Current Rating:7A AC/DC

Withstanding Voltage:1500VAC/minute

Insulation Resistance:1000MΩ min.

Temperature Range:-25°C - +85°C

Contact Resistance:20mΩ max

HOUSING

Part No: SCT3961H-XXP

Pole: 02-12

Material:Nylon 66,UL94V-0

PART NO	DIMENSION	
	A	B
SCT3961H-02	3.96	8.20
SCT3961H-03	7.92	12.16
SCT3961H-04	11.88	16.12
SCT3961H-05	15.84	20.08
SCT3961H-06	19.80	24.04
SCT3961H-07	23.76	28.00
SCT3961H-08	27.72	31.96
SCT3961H-09	31.68	35.92
SCT3961H-10	35.64	39.92
SCT3961H-11	39.60	43.88
SCT3961H-12	43.56	47.84

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	CHENA	2005.03.18	SCALE	UNIT	mm	PART NO.	TITLE:	DRAWING NO.
0	05/12/27	NEW			~ 10 ±0.15	DESIGN						SCT3961H-XXP	VH3.96 HOUSING	SCT3961
					20 ~ 30 ±0.30	CHECK	MICKY	2005.03.18						
					30 ~ ±0.50	APPROVE	HELLEN	2005.03.18						
					Angle ± 2'									
					DIM TOL									

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED