

1 2 3 4 5 6 7 8 9 10

A

B

C




D

E

F

G

H

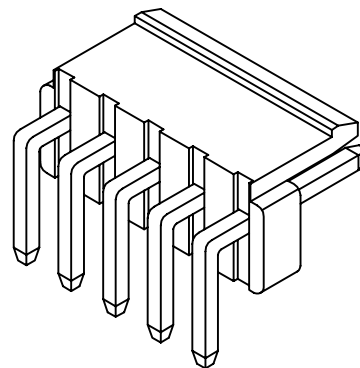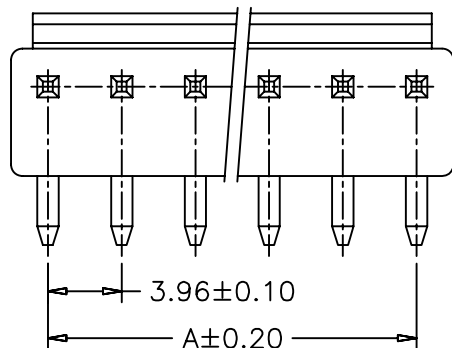

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 7A AC/DC

Withstanding Voltage: 1500V AC/minute

Insulation Resistance: 1000M Ω min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20m Ω max



WAFER

Part No: SCT3961WR-XXP

Pole: 02-12

Material: Nylon 66, UL94V-0

Pin: Brass, Tin plated

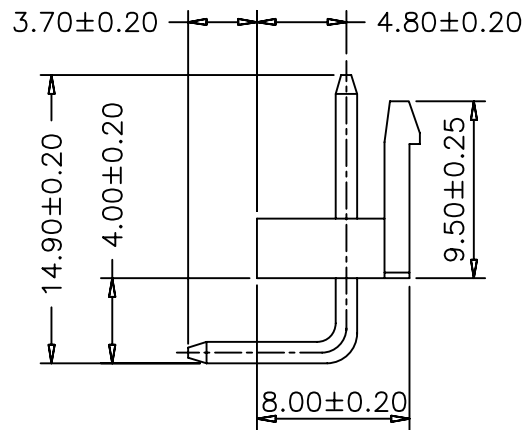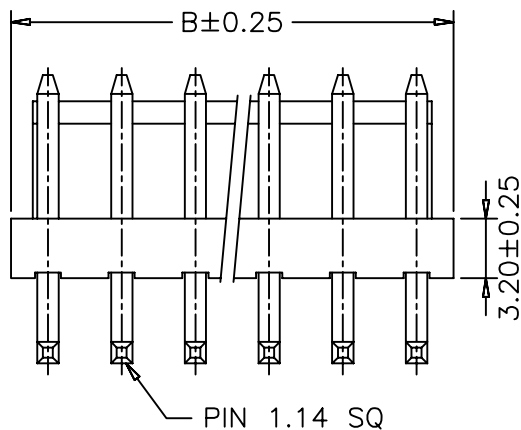

PART NO	DIMENSION	
	A	B
SCT3961WR-02	3.96	8.00
SCT3961WR-03	7.92	11.96
SCT3961WR-04	11.88	15.92
SCT3961WR-05	15.84	19.88
SCT3961WR-06	19.80	23.84
SCT3961WR-07	23.76	27.80
SCT3961WR-08	27.72	31.76
SCT3961WR-09	31.68	35.72
SCT3961WR-10	35.64	39.68
SCT3961WR-11	39.60	43.64
SCT3961WR-12	43.56	47.60

					OPERATION	DRAW	CHENA	2005.03.18	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ± 0.15	DESIGN			UNIT	mm		
					20 ~ 30 ± 0.30	CHECK			SIZE	A4	PART NO.	SCT3961WR-XXP
0	05/12/27	NEW			30 ~ ± 0.50	APPROVE	MICKY	2005.03.18	SHEET	1/1	TITLE:	VH3.96 90C WAFER
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle $\pm 2^\circ$ DIM TOL	APPROVE	HELLEN	2005.03.18	PROJ.		DRAWING NO.	SCT3961

1 2 3 4 5 6 7 8 9 10