




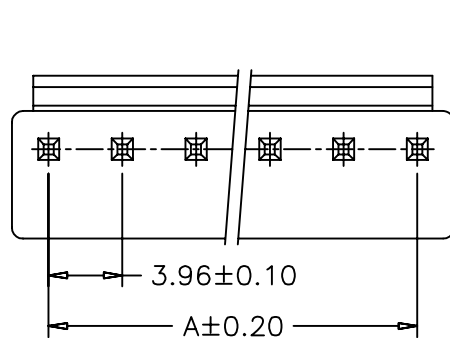

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 7A AC/DC

Withstanding Voltage: 1500V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max



WAFER

Part No: SCT3961WV-XXP

Pole: 02-12

Material: Nylon 66, UL94V-0

Pin: Brass, Tin plated

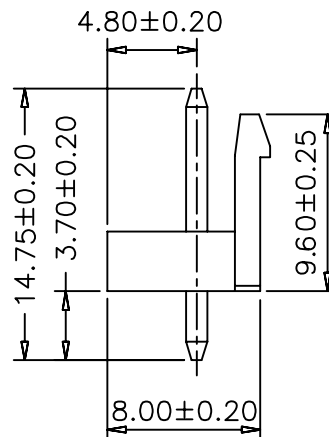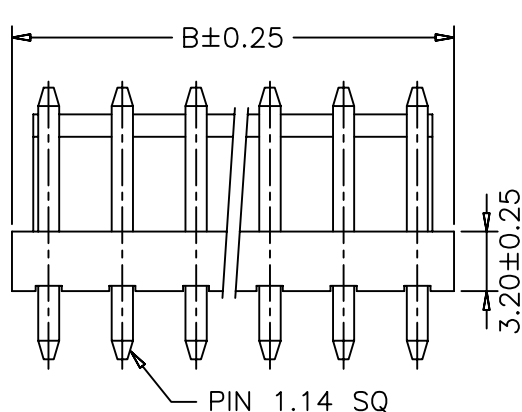

PART NO	DIMENSION	
	A	B
SCT3961WV-02	3.96	8.00
SCT3961WV-03	7.92	11.96
SCT3961WV-04	11.88	15.92
SCT3961WV-05	15.84	19.88
SCT3961WV-06	19.80	23.84
SCT3961WV-07	23.76	27.80
SCT3961WV-08	27.72	31.76
SCT3961WV-09	31.68	35.72
SCT3961WV-10	35.64	39.68
SCT3961WV-11	39.60	43.64
SCT3961WV-12	43.56	47.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	CHENA	2005.03.18	SCALE	SCONDA 森康达电子有限公司 SCONDA ELECTRONIC LIMITED	
					~ 10 ±0.15				UNIT		
0	05/12/27	NEW			20 ~ 30 ±0.30	DESIGN	MICKY	2005.03.18	SIZE	A4	PART NO.
					30 ~ ±0.50	CHECK			SHEET	1/1	TITLE:
					Angle ± 2'	APPROVE			PROJ.	◆	DRAWING NO.
					DIM TOL	HELLEN					SCT3961