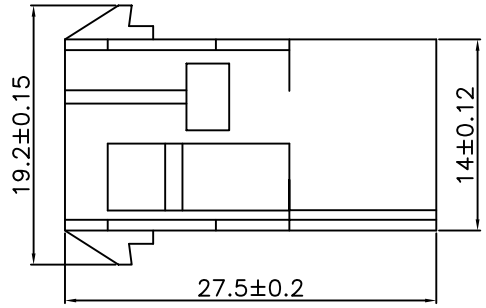

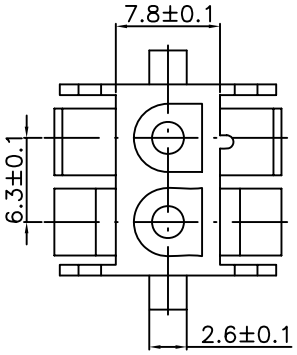

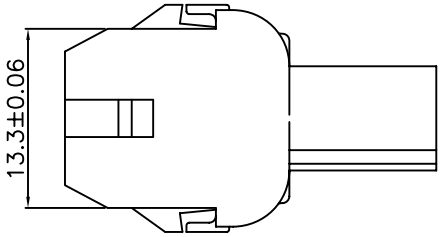

SPECIFICATIONS

Voltage rating: 250V AC,DC
Current rating: 3A,AC,DC
Withstanding Voltage: 1000V AC/minute
Insulation resistance:1000M Ωmin
Temperature range:-25 ℃ - +85℃
Applicable PC board thickness: 0.063″(1.6mm)
Contact resistance:Initial Value/10m Ω max
After environmental Texting/20m Ω

HOUSING

Part No:SCT63080FH-02P
Material:Nylon 66 UL 94V-2
Q'TY: 500, 1000 pcs/bag

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	Micky.Liu	2006/05/02
DESIGN		
CHECK	Judy.Huang	2006/05/02
APPROVE	Hellen.Li	2006/05/02

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED

PART NO.	SCT63080FH-02P
TITLE:	63080 2P FEMALE HOUSING
DRAWING NO.	SCT63080