
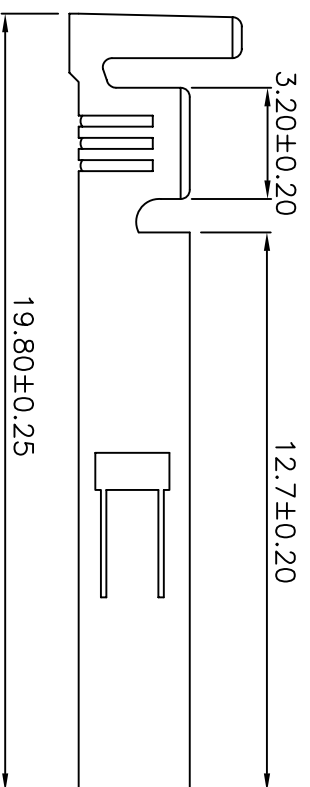




SPECIFICATIONS

Voltage rating: 300V AC, DC
Current rating: 10A, AC, DC
Withstanding Voltage: 1500V AC/minute
Insulation resistance: 1000M Ωmin
Temperature range: -25 °C - +85 °C
Applicable PC board thickness: 0.063”(1.6mm)
Contact resistance: Initial Value/10m Ω max
After environmental Texting/20m Ω

TERMINAL

Part No: SCT63080FT
Wire Range: AWG#20-#16 (OD3.8mm max)
Material: Phos. Bronze
Finish: Tin Plated

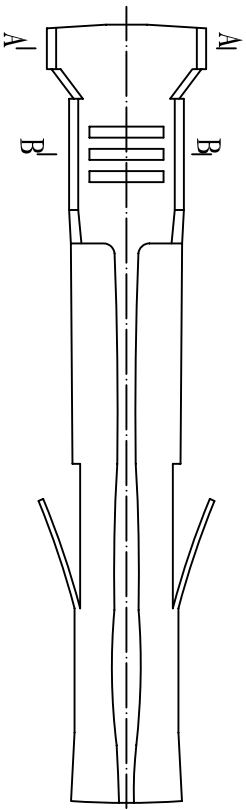

A-A
B-B

						SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED			
						SCALE			
						UNIT	mm		
						SIZE	A4		PART NO.
						SHEET	1/1		TITLE:
						PROJ.			DRAWING NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION ~ 10 20 ~ 30 30 ~ Angle DIM	DRAW DESIGN CHECK APPROVE	Micky.Liu Judy.Huang Hellen.Li	2006/05/02 2006/05/02	
0	05/12/27	NEW	——	——	± 0.15 ±0.30 ±0.50				SC163080FT
									63080 FEMALE TERMINAL
									SC163080