


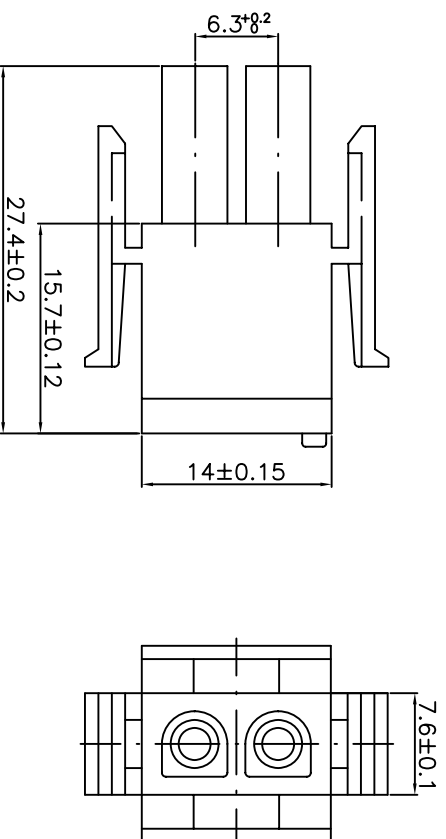


SPECIFICATIONS

Voltage rating: 250V AC, DC
 Current rating: 3A, AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation resistance: 1000M Ω min
 Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
 Applicable PC board thickness: 0.063"(1.6mm)
 Contact resistance: Initial Value/10m Ω max
 After environmental Testing/20m Ω

HOUSING

Part No: SCT63080WV-04P
Material: Nylon 66 UL 94V-2
Q'TY: 500, 1000 pcs/bag

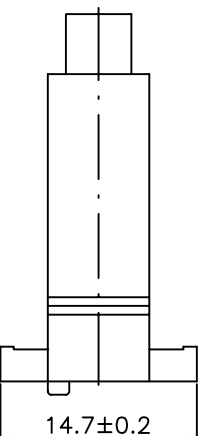[illegible]