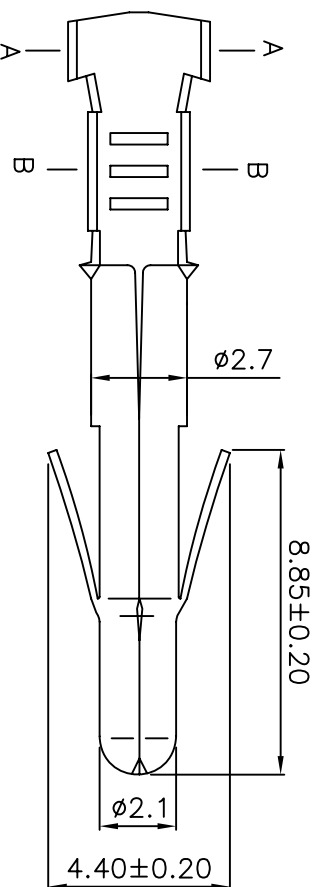
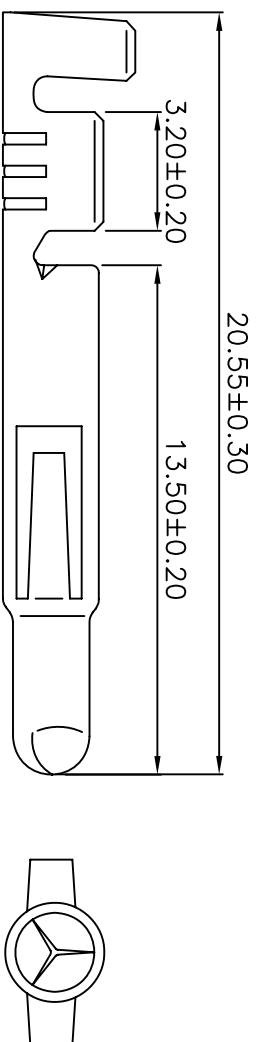



SPECIFICATIONS

Voltage rating: 300V AC, DC
 Current rating: 10A, AC, DC
 Withstanding Voltage: 1500V AC/minute
 Insulation resistance:1000M Ω min
 Temperature range:-25 $^{\circ}$ C - +85 $^{\circ}$ C
 Applicable PC board thickness: 0.063"(1.6mm)
 Contact resistance:Initial Value/10m Ω max
 After environmental Texting/20m Ω

TERMINAL
 Part No:SCT63080MT
 Wire Range:AWG#20-#16 (OD3.8mm max)
 Material:Phos. Bronze
 Finish:Tin Plated

						森康达电子有限公司 SCCONDAR ELECTRONIC LIMITED			
			OPERATION	DRAW	Micky Liu	2006/05/02	SCALE		
			~ 10 ±0.15	DESIGN			UNIT	mm	
			20 ~ 30 ±0.30				SIZE	A4	
			30 ~ ±0.50	CHECK	Judy Huang	2006/05/02	SHEET	1/1	
0	05/12/27	NEW	_____	_____			PROJ.		DRAWING NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Hellen.Li	2006/05/02			SC763080
									SC763080T
									63080 MALE TERMINAL