


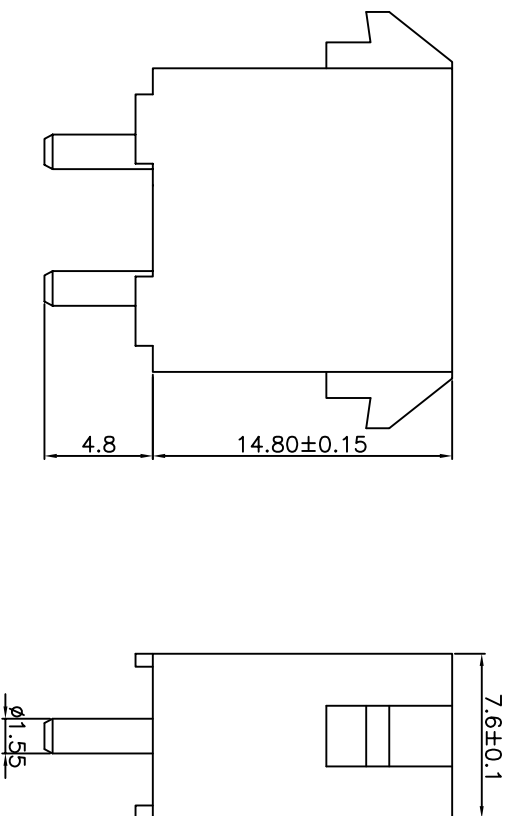

SPECIFICATIONS

Voltage rating: 250V AC, DC
 Current rating: 3A, AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation resistance: 1000M Ω min
 Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
 Applicable PC board thickness: 0.063"(1.6mm)
 Contact resistance: Initial Value/10m Ω max
 After environmental Texting/20m Ω

HOUSING


Part No: SCT63080WV-02P

Material:

BASE: Nylon 66 UL 94V-2

CONTACT: BRASS Tin Plated

Q' TY: 500, 1000 pcs/bag

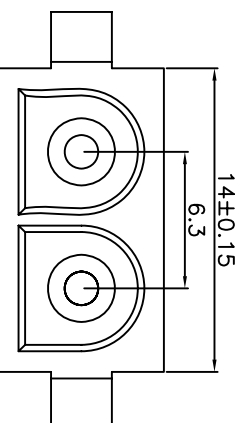

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	Micky.Liu	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10	±0.15				UNIT	mm		
0	05/12/27	NEW	—	—	20 ~ 30	±0.30	DESIGN			SIZE	A4	PART NO.	SCT63080WV-02P
					30 ~	±0.50	CHECK	Judy.Huang	2006/05/02	SHEET	1/1	TITLE:	63080 2P 180C WAFER
					Angle	± 2'	APPROVE	Hellen.Li	2006/05/02	PROJ.	◆ ⇒	DRAWING NO.	SCT63080

1

2

3

4

5

6

7

8

9

10