
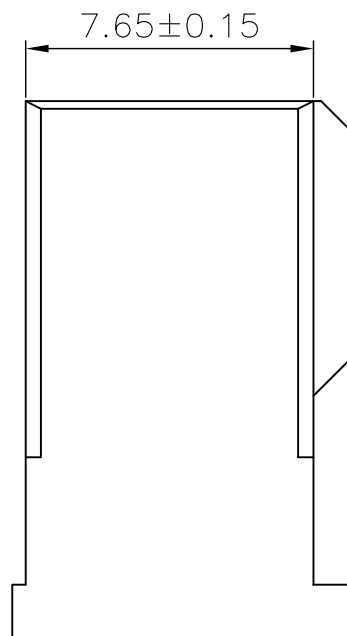
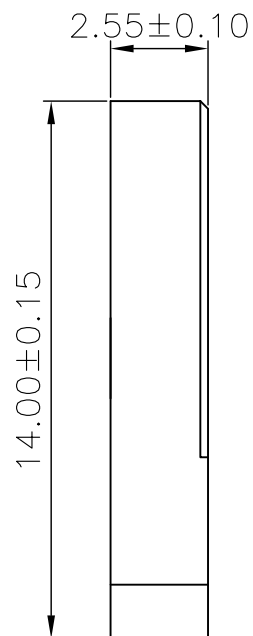
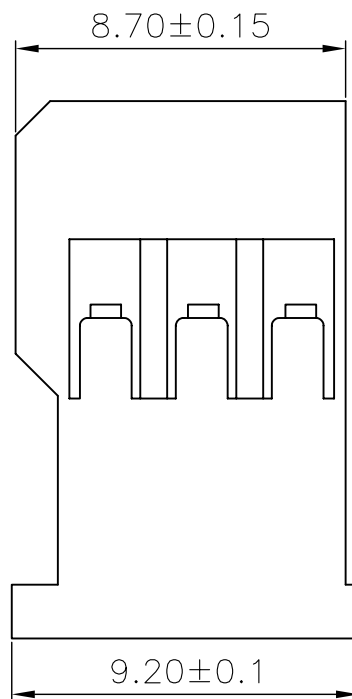


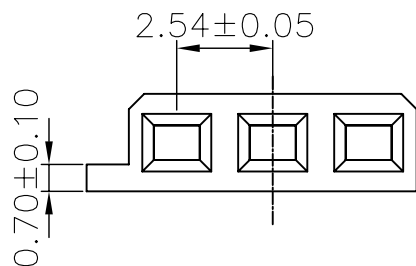

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 3A AC/DC

Withstanding Voltage: 1000V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2546H1-03PB

Material: PA66, UL94V-2

H						OPERATION	DRAW	CHENA	2014.09.05	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
		14/11/04	9.1MM变更为9.2MM	SIMON		20 ~ 30 ±0.30		CHECK	MICKY	2014.09.05	SIZE	A4	PART NO.
	0	05/12/27	NEW			30 ~ ±0.50	APPROVE		HELLEN	2014.09.05	SHEET	1/1	TITLE:
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2' DIM TOL					PROJ.		DRAWING NO.