

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

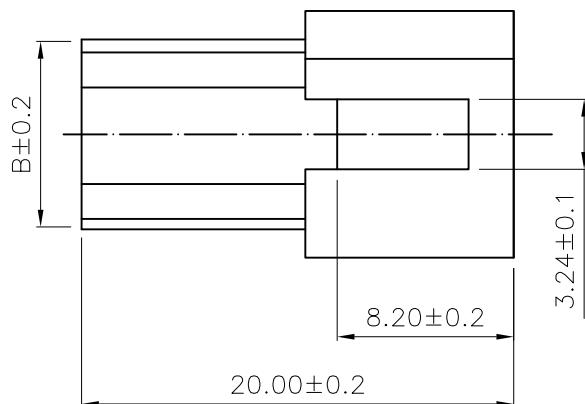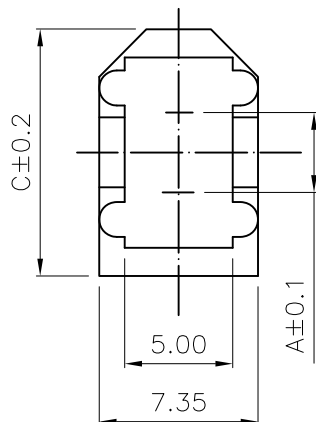

SPECIFICATIONS

Pitch:3.7

Applicable wire:AWG#26~#18

Rated voltage:250V DC,AC

Rated Current:5.0A(AWG#20)

Withstand voltage:1500V AC/min


Working Temp:-25°C~+85°C

Insulation resistance:≥1000MΩ

Contact resistance:≤20mΩ

MATERIAL

Nylon66,UL94-0

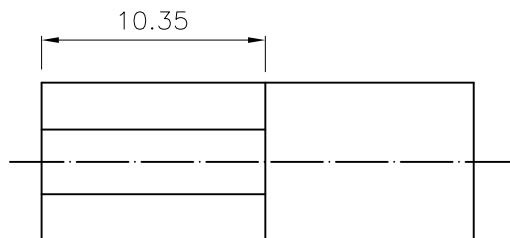

POLES \ DIM	A	B	C
2P	3.70	8.60	11.40
3P	7.40	12.30	15.10

					OPERATION		DRAW	YANG	2016.05.24	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10	±0.15	DESIGN			UNIT	mm		
					20 ~ 30	±0.30					SIZE	A4	PART NO.
0	05/12/27	NEW	_____	_____	30 ~	±0.50	CHECK	Mikey	2016.05.24	SHEET	1/1	TITLE:	1.58 Male Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2' TOL	APPROVE	Allen	2016.05.24	PROJ.		DRAWING NO.	SCT3700

1 2 3 4 5 6 7 8 9 10