


SPECIFICATIONS
Voltage Rating: 300V AC/DC
Current Rating: 9A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 1000M Ω min.
Temperature Range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
Contact Resistance: 20m Ω max

HOUSING
Part No: SCT4500MH-1x02P
Material: Nylon 66, UL94V-0

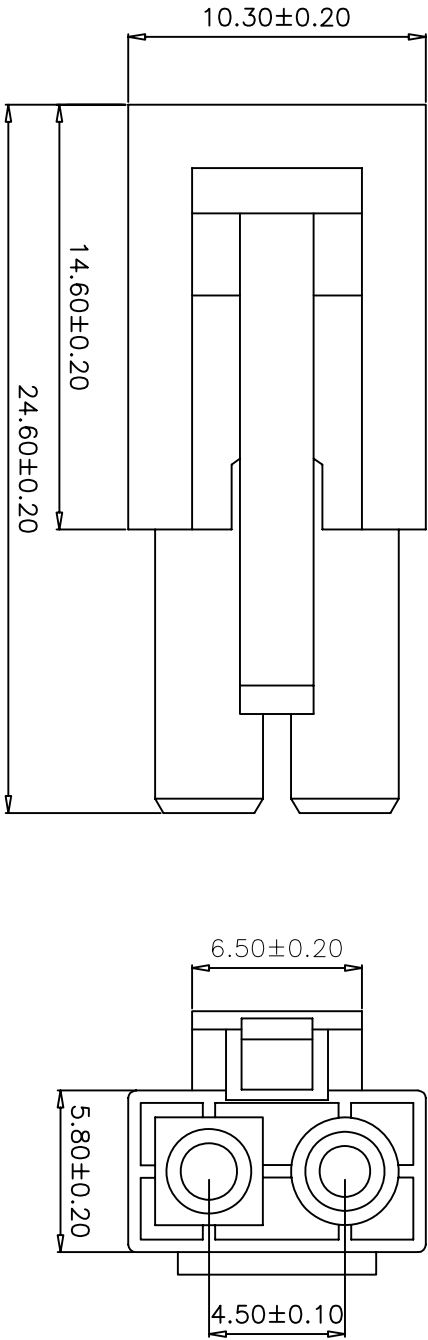

						OPERATION		DRAW		Judy Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED SCT4500MH-02P ø1.3 EL4.5 MALE HOUSING SCT4500					
						~ 10 ±0.15		DESIGN				UNIT						mm	
						20 ~ 30 ±0.30						SIZE						A4	
						30 ~ ±0.50		CHECK		Micky Liu	2006/05/02	SHEET						1/1	
						Angle ± 2°				Hellen Li	2006/05/02	PROJ.							
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	APPROVE			DRAWING NO.							
0	05/12/27	NEW			_____	_____						TITLE:		ø1.3 EL4.5 MALE HOUSING					

1 2 3 4 5 6 7 8 9 10