


$\phi 1.30 \pm 0.10$

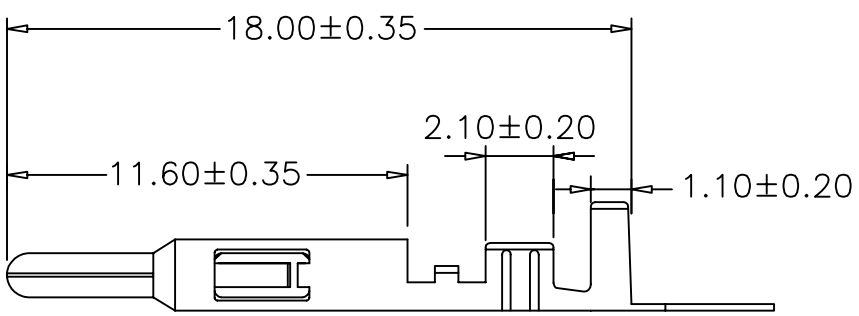


SPECIFICATIONS


Voltage Rating: 300V AC/DC
Current Rating: 9A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 1000M Ω min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20m Ω max

TERMINAL

Part No: SCT4500MT
Wire Range: AWG#16-#24
Material: Phosphor Bronze
Finish: Tin Plated
Thickness: 0.2mm
Q\TY: 10,000PCS/Reel




A-A



B-B

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

						森康达电子有限公司 SCONDAR ELECTRONIC LIMITED				
				OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		
				~ 10	DESIGN			UNIT	mm	
				20 ~ 30				SIZE	A4	PART NO.
				30 ~	CHECK	Micky.Liu	2006/05/02	SHEET	1/1	TITLE:
0	05/12/27	NEW	————	Angle	APPROVE	Hellen.Li	2006/05/02	PROJ.		DRAWING NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					SCT4500

1 2 3 4 5 6 7 8 9 10