


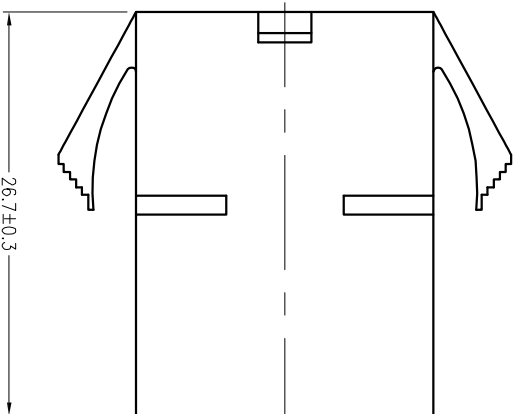

Poles	DM.A	DM.B	DM.C	DM.D
2	6.2	–	7.2	13.4
3	12.4	–	7.2	19.6
4	6.2	6.2	13.4	13.4
6	12.4	6.2	13.4	19.6
9	12.4	12.4	19.6	19.6
12	18.6	12.4	19.6	25.8
15	24.8	12.4	19.6	32.0

Voltage Rating: 300V AC/DC
 Current Rating: 7A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000M Ω min.
 Temperature Range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
 Contact Resistance: 10m Ω max

Material: Nylon 66, UL94V-2

SCT
森康达电子有限公司
S'CONDAR ELECTRONIC LIMITED