
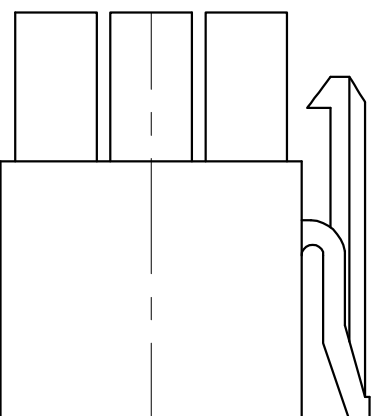
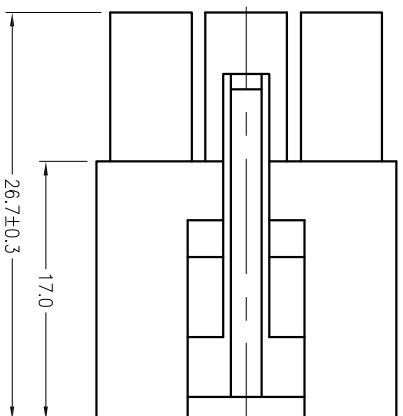


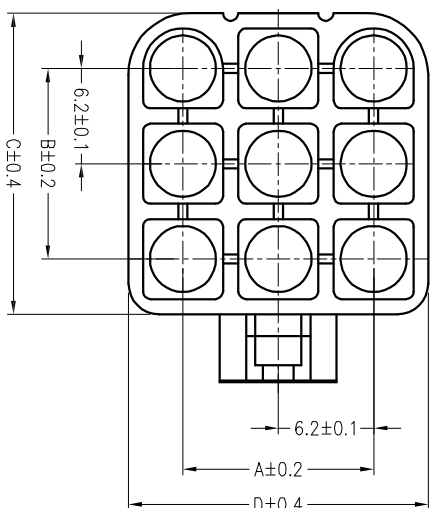

Poles	DIM.A	DIM.B	DIM.C	DIM.D
2	6.2	—	7.2	13.4
3	12.4	—	7.2	19.6
4	6.2	6.2	13.4	13.4
6	12.4	6.2	13.4	19.6
9	12.4	12.4	19.6	19.6
12	18.6	12.4	19.6	25.8
15	24.8	12.4	19.6	32.0

SPECIFICATIONS

Voltage Rating: 300V AC/DC
 Current Rating: 7A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 10mΩ max

HOUSING

Part No: SCT6200MH-XXP
 Material: Nylon 66, UL94V-2

OPERATION		DRAW		SCALE		SCT 森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED			
~ 10	±0.15	DESIGN	Micky.Liu	UNIT	mm	PART NO.	SCT6200MH-XXP		
20 ~ 30	±0.30	CHECK	Judy.Huang	SIZE	A4	TITLE:	L6.2 MALE HOUSING		
30 ~	±0.50	APPROVE	Hellen.Li	SHEET	1/1	DRAWING NO.	SCT6200		
Angle	± 2'	APPROVE		PROJ.					
DIM	TOL								
1	2	3	4	5	6	7	8	9	10
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE					
0	05/12/27	NEW							