
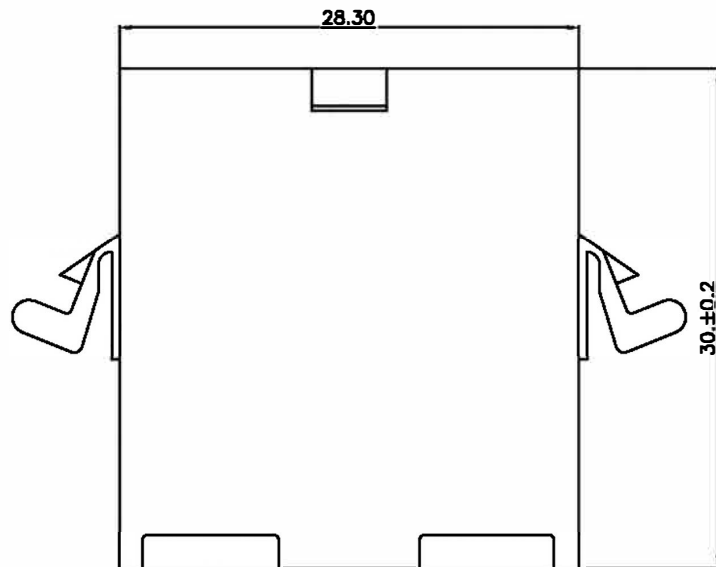


SPECIFICATIONS

Voltage rating: 250V AC, DC
 Current rating: 12A, AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation resistance: 1000M Ω min
 Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
 Applicable PC board thickness: 0.063" (1.6mm)
 Contact resistance: Initial Value/10m Ω max
 After environmental Testing/20m Ω

HOUSING

Part No: SCT6700FH-04P
 Material: Nylon 66 UL 94V-2
 Q' TY: 500, 1000 pcs/bag

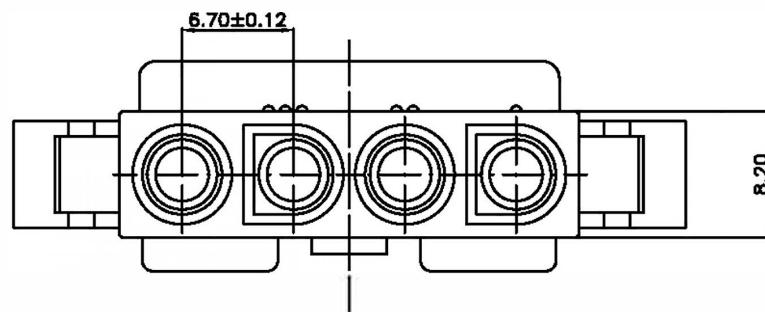

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Judy	2015.07.18	SCALE	UNIT	mm	S' CONДАР ELECTRONIC LIMITED	
0		05/12/27	NEW			~ 10 ±0.15	DESIGN						森康达电子有限公司	
						20 ~ 30 ±0.30	CHECK	JET YU	2015.07.18				SCT6700FH-04P	
						30 ~ ±0.50	APPROVE	Hellen	2015.07.18				TITLE: 6.7 FEMALE HOUSING	
						Angle ± 2°							DRAWING NO. SCT6700	
						DIM TOL								