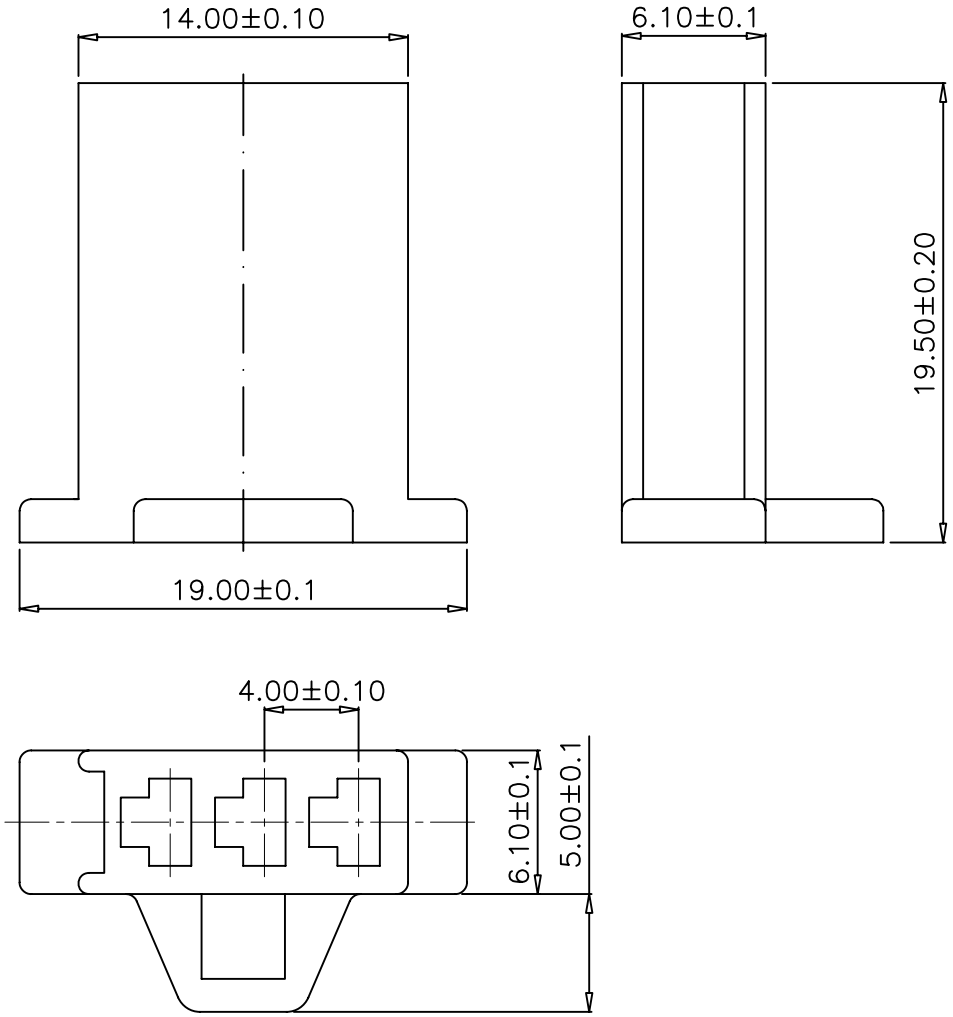


SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 8A AC/DC
Withstanding Voltage: 1000V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

HOUSING
Part No: SCT28050mH-1x03P
Material: Nylon 66, UL94V-0

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE |
|---|---|---|---|---|
| 0 | 05/12/27 | NEW | ——— | ——— |

| OPERATION | |
|---|---|
| ~ 10 | ±0.15 |
| 20 ~ 30 | ±0.30 |
| 30 ~ | ±0.50 |
| Angle | ± 2° |
| DIM | TOL |

| | | |
|---|---|---|
| DRAW | simon | 2015/01/29 |
| DESIGN | | |
| CHECK | Micky.Liu | 2015/01/29 |
| APPROVE | Hellen.Li | 2015/01/29 |

| | |
|---|---|
| SCALE | |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

| | |
|---|---|
| PART NO. | SCT28050MH-03P |
| TITLE: | 28050 FEMALE HOUSING |
| DRAWING NO. | SCT28050 |